ELEVAR NEW VISION (ENV)
Workstation

Introducing the next generation in Ergonomic Desking, the ENV system. Available in 2-leg or 4-leg back-to-back systems, the ENV takes ergonomics into consideration from the moment you begin assembly. Equipped with the latest in mounting technology and designed by Elevar and their European partners, ENV brings a faster, quieter, more enjoyable sit-to-stand experience that must be seen to be believed.
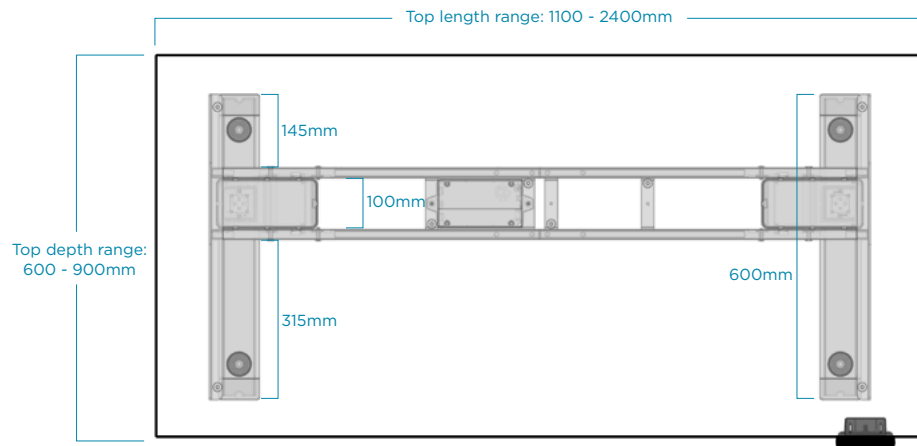
ENV Workstations by Elevar - Raising the Standard.

Product Type	Three Stage Electric Leg - One Motor per Leg
Configuration	180° Freestanding | 180° Back to Back
Height Range	620mm - 1282mm with 25mm Top | AS/NZS 4442 Standard Compliant
Top Size	1200mm - 2400mm L x 600mm - 900mm D Freestanding
	1300mm - 2000mm L x 600mm - 900mm D Back to Back
Frame Type	Quick Frame | Pre-Assembled Cabling and Electrics | Virtually Tool-less Assembly | QuickRim™ Fast Assembly System
Foot Type	600mm C-Foot with 30° Angle on Freestanding | 600mm T-Foot with 30° Angle on Freestanding with Cable Tray
	Post Legs on Back to Back System
	Adjustable Glides +/- 15mm
Controller	3 Programmable favourite height buttons
	Container / Shelf stop for custom min and max height
	Collision control with adjustable sensitivity
	Gyroscopic tilt sensor with adjustable sensitivity
	Desk lock
	USB-C charging port
Cable Tray / Screen	Telescopic cable tray with lid | Punchouts for up to 16x power and data points
	Quick Rim system | 1300mm - 1900mm adjustability | Optional joiners for seamless cable management
	Segregated for power and data | Punchout and anchor points for Umbilical
	Integrated screen brackets included for screen sizes between 10mm - 50mm
Travel Speed / Volume	50mm/second | <45dB
Weight Capacity	120kg per frame
Finish	Pearl White, Jet Black
Warranty	10 Years Frame, Mechanics, and Electrics

elevar

ENV2
Freestanding 2-Leg

Top Dimensions

Top length range: 1100 - 2400mm

145mm

100mm

Top depth range:
600 - 900mm

600mm

315mm

Frame Dimensions

Frame lengths
Short: 1100 - 1500mm
Long: 1300 - 1900mm
X-Long: 1700mm - 2300mm

Between feet: 905 - 2105mm

80mm

Frame / Height Dimensions

Height range: 595 - 1257 mm
(excludes top)

350mm   180mm

600mm

elevar

ENV2-TRAY
Quickrim Cable Tray and Screen Brackets

Dimensions
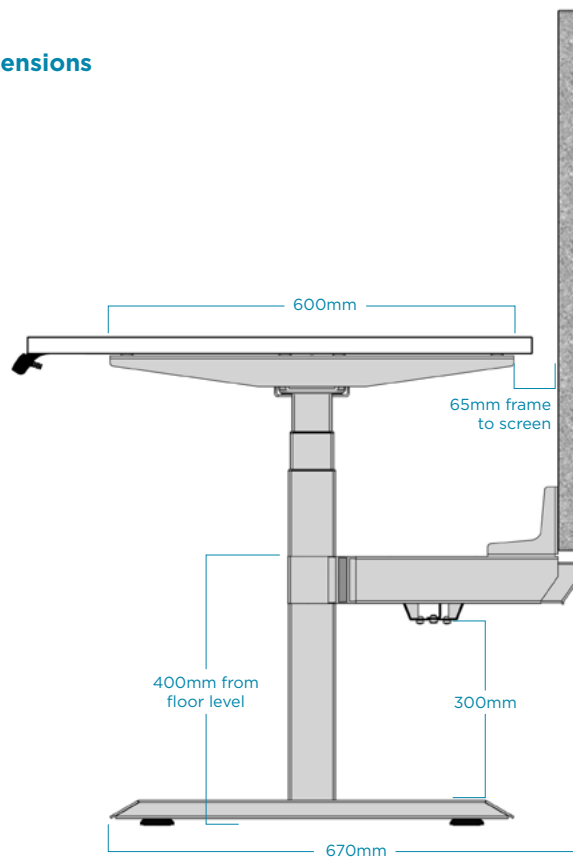
Frame Dimensions (top view)

330mm back of support to back of leg

415mm front of tray to front of frame

600mm

65mm frame to screen

400mm from floor level

300mm

670mm
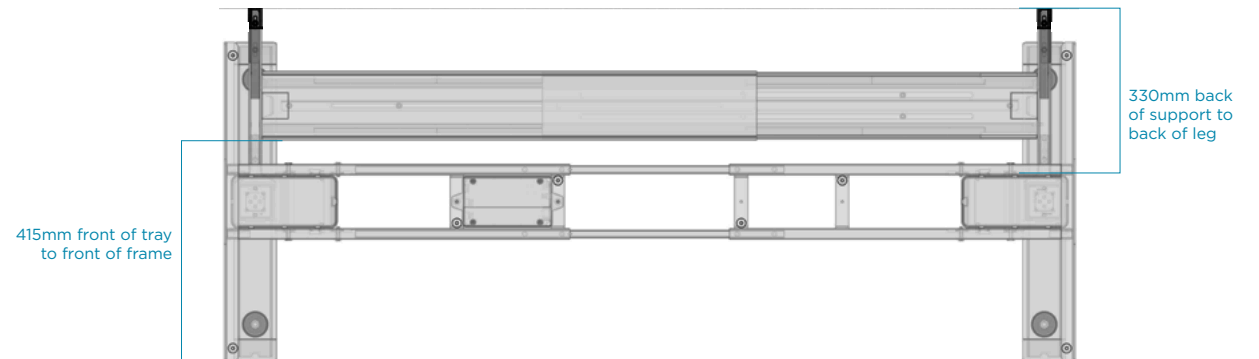
Frame Dimensions (side view)

45mm

25mm

44mm

25mm

elevar
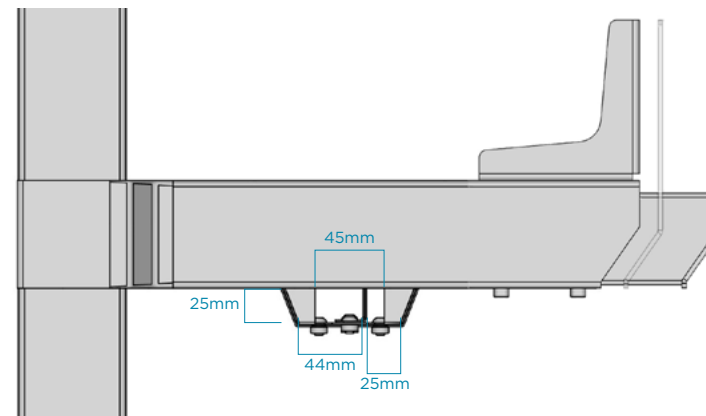
ENV2-TRAY
Quickrim Cable Tray and Screen Brackets

Frame Dimensions

Frame length: 1300 - 1900mm
Suits top 1400 - 2000mm
30mm gap between tops

130mm

Cable tray range: 1155 - 1755mm

Between feet: 1105 - 1705mm

160mm

Frame Height Dimensions

525mm maximum under desk obstruction height (pedestals, bookcases etc)

595mm minimum frame height

Joiner Box Dimensions

130mm top width

85mm high

70mm bottom width
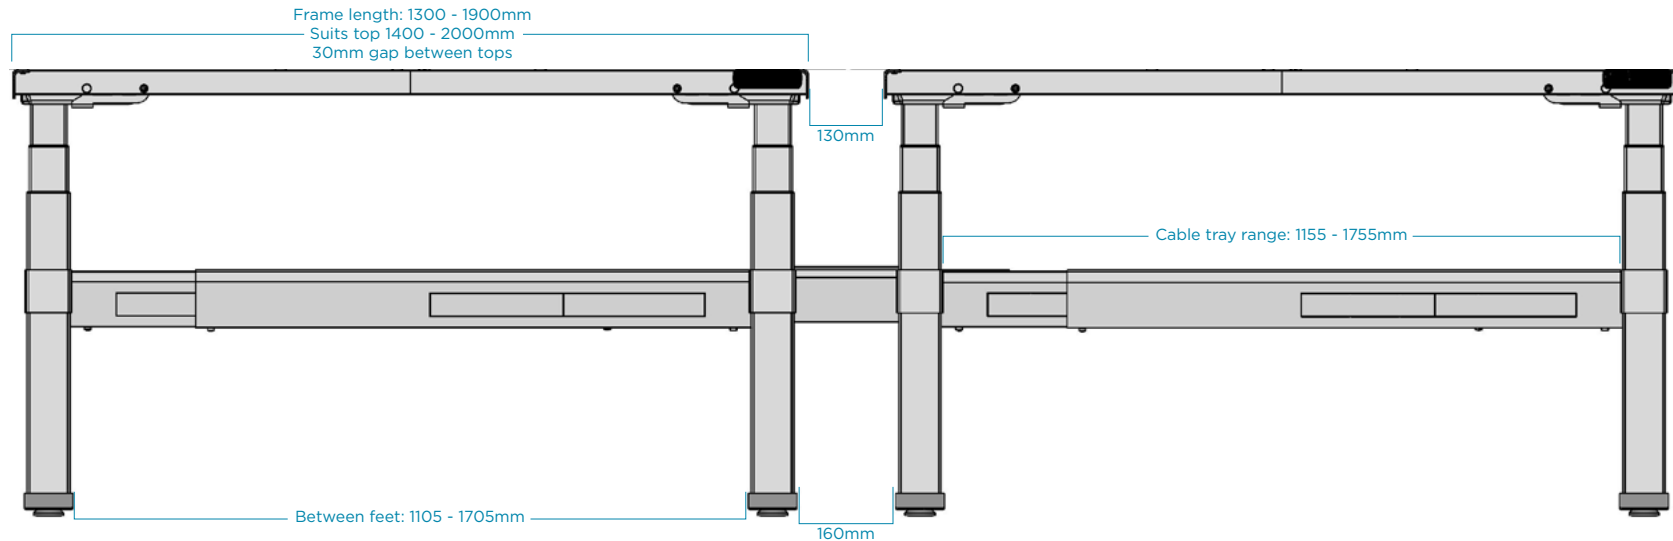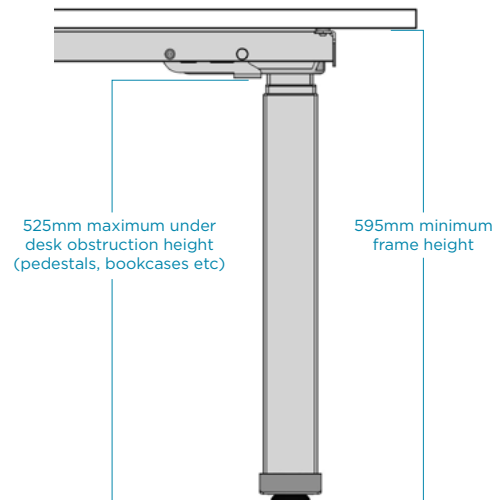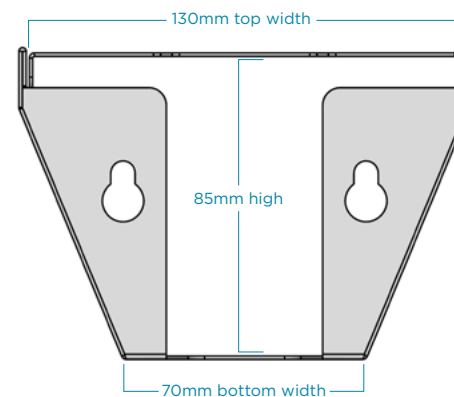
Acoustic/Extruded Screen Bracket
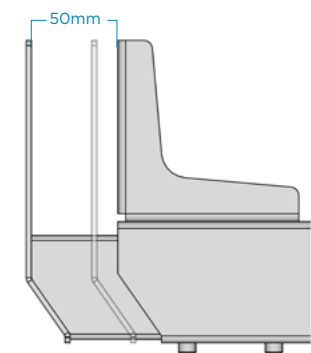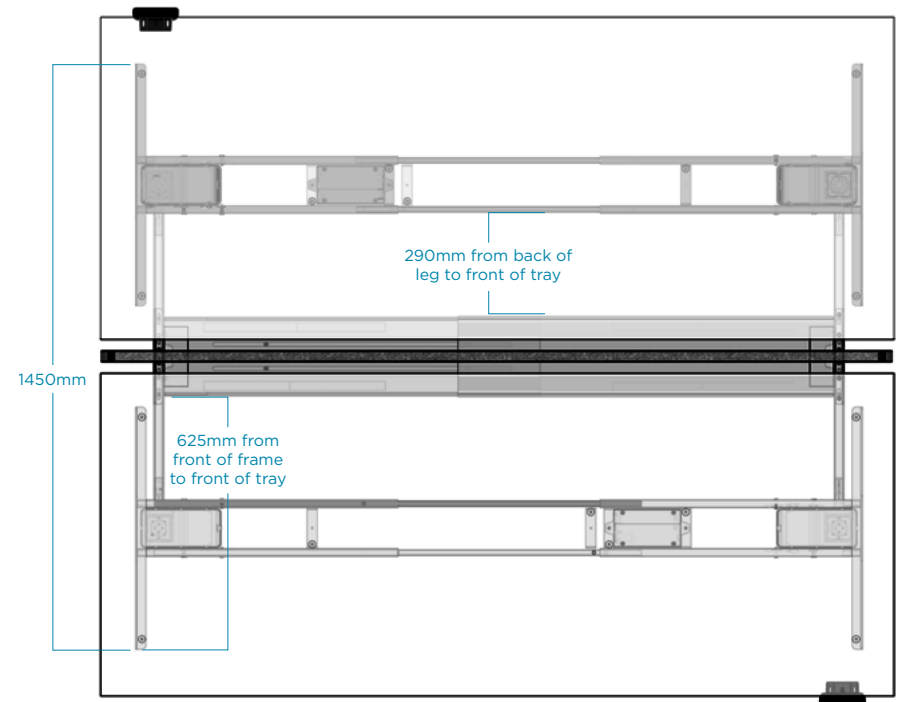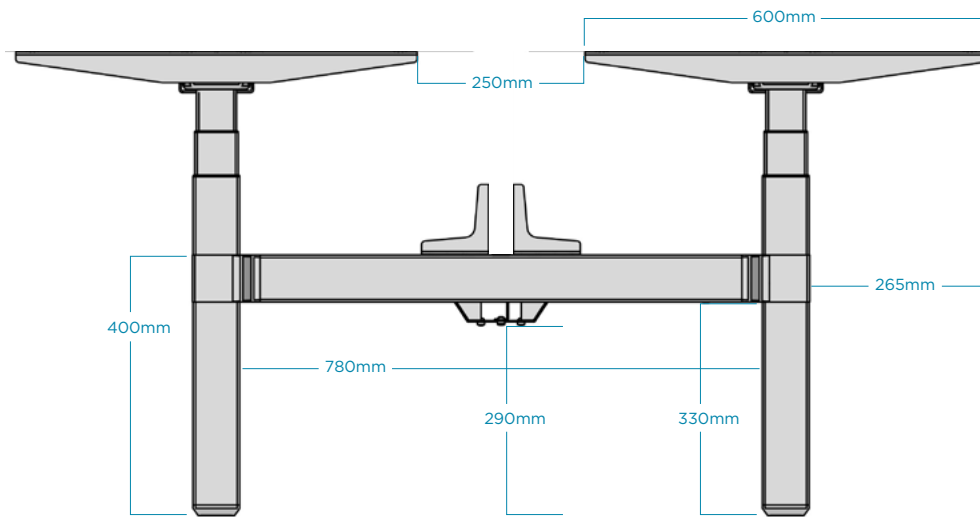
50mm

elevar

ENV4
Back to back workstation system

Frame Dimensions

600mm

250mm

400mm

780mm

290mm

330mm

265mm

1450mm

290mm from back of
leg to front of tray

625mm from
front of frame
to front of tray

elevar

ENV4
Back to back workstation system

Frame Dimensions

Frame length: 1300 - 1900mm
Suits top 1400 - 2000mm
30mm gap between tops

130mm

Cable tray range: 1155 - 1755mm

Between feet: 1115 - 1715mm

170mm

Joiner Box Dimensions

Width: 200mm external | 195mm internal

Top of mount: 110mm

Top of lid: 90mm*
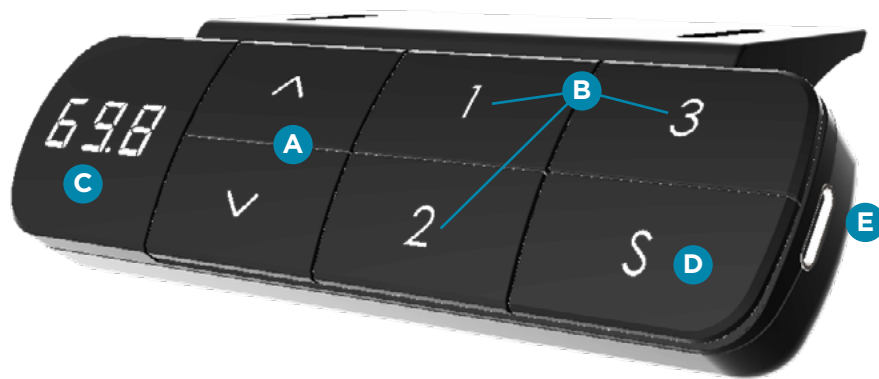
100mm

220mm

200mm

40mm

22mm
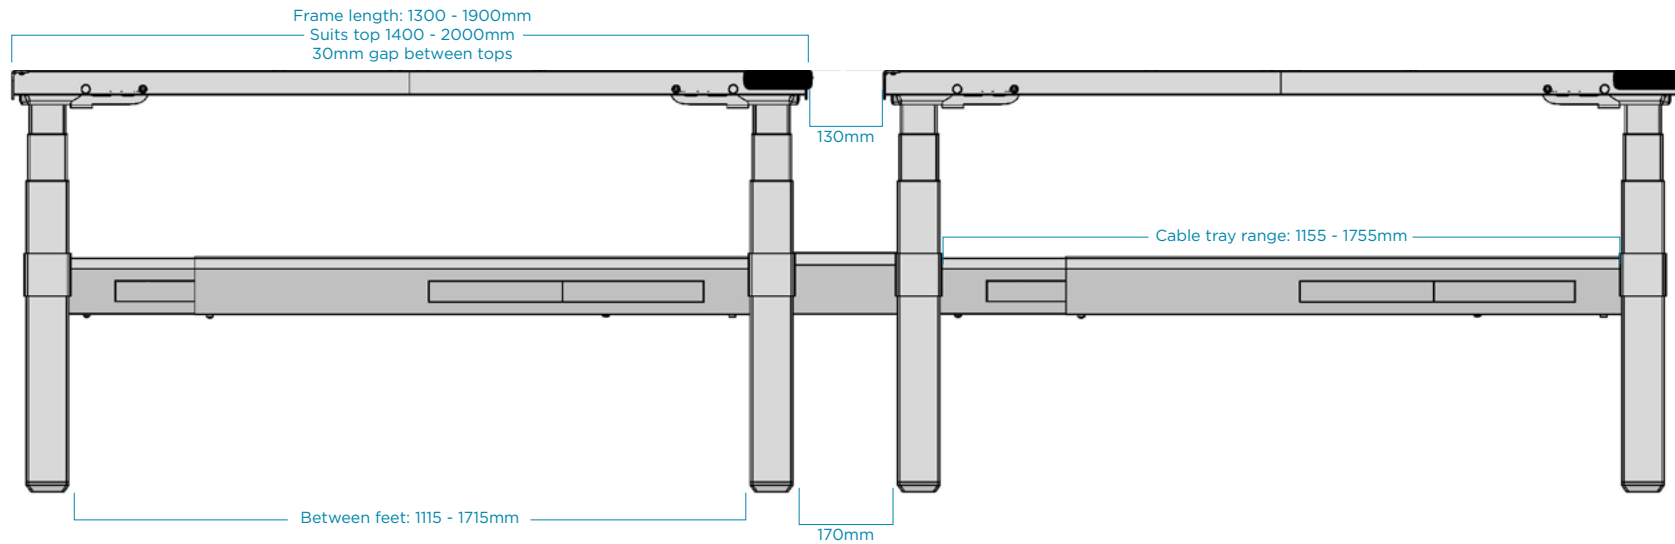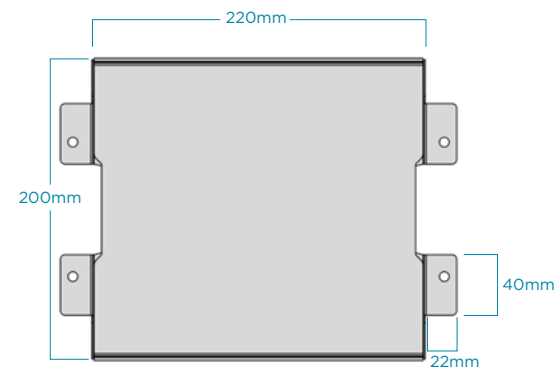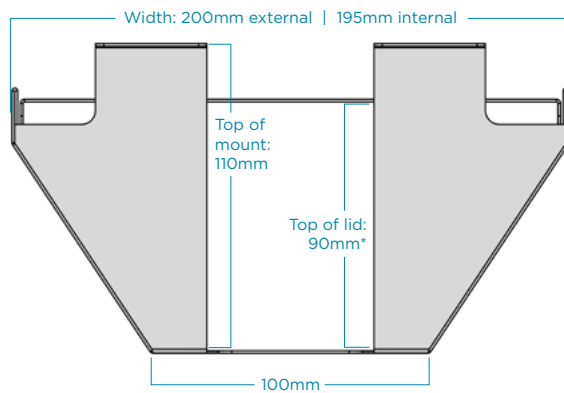
* Tray sits 20mm below rail to ensure ease of access when screens are installed.

elevar

ENV2-TRAY
Universal Dimensions

Handset

A. Up/down buttons
B. Programmable favourite height buttons
C. Height display in centimeters
D. Settings program button for customised settings
E. USB-C charging port

Cable Tray Dimensions

1800mm top: 16x GPO and/or data | Front and back | Top lid exits both sides

1500mm top: 8x GPO and/or data | Front and back | Top lid exits one side

1300mm top: internal power and data only | Top lid exits one side

elevar

Inspire. Create. Deliver.

P4.