

true

MATERIAL FINISHES
AND COLOR SWATCHES
2025



MATERIAL FINISHES

The colour samples are indicative and are representative only; not intended as an exact replica of the actual colour of the product.

I campioni di colori sono indicativi e si intendono a solo scopo rappresentativo, non devono essere intesi quali riproduzioni esatte del colore effettivo del prodotto.
Les vignettes de couleurs ne sont fournies qu'à titre indicatif et ne sauraient reproduire fidèlement la couleur véritable du produit.

true

STANDARD STEEL RAL COLORS

COLORI RAL STANDARD PER ACCIAIO - COULEURS RAL STANDARD POUR L'ACIER



RAL 1002
Sand yellow



RAL 7000
Squirrel grey



RAL 1013
Oyster white



RAL 7010
Tarpaulin grey



RAL 1017
Saffron yellow



RAL 7033
Cement grey



RAL 2001
Red orange



RAL 7044
Silk grey



RAL 3013
Tomato red



RAL 8001
Ochre brown



RAL 3016
Coral red



RAL 8012
Red brown



RAL 5008
Grey blue



RAL 8014
Sepia brown




RAL 6013
Reed green



RAL 9005
Jet black



RAL 6021
Pale green



RAL 9010
Pure white



RAL 6028
Pine green

The colour samples are indicative and are representative only; not intended as an exact replica of the actual colour of the product.
I campioni di colori sono indicativi e si intendono a solo scopo rappresentativo, non devono essere intesi quali riproduzioni esatte del colore effettivo del prodotto.
Les vignettes de couleurs ne sont fournies qu'à titre indicatif et ne sauraient reproduire fidèlement la couleur véritable du produit.

STANDARD WOOD FINISHES

FINITURE IN LEGNO STANDARD - FINITIONS STANDARD DU BOIS



Natural oakwood

Rovere naturale
Chêne naturel




Natural ashwood

Frassino naturale
Frêne naturel




American walnut

Noce americano
Noyer américain

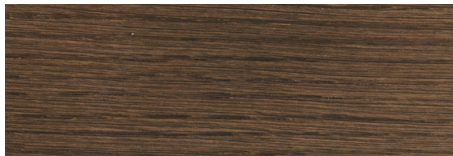

Dark/smoked oakwood

Rovere scuro/affumicato
Chêne foncé/fumé

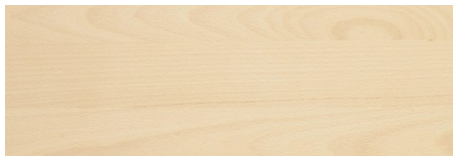


Beechwood

Faggio
Hêtre



Arpa 4520 oakwood laminate

Laminato Arpa 4520 rovere
Stratifié Arpa 4520 chêne

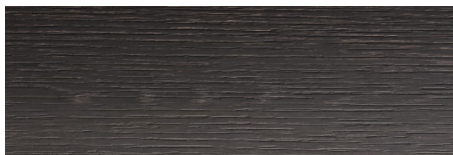


Arpa 4512 oakwood barrique

Arpa 4512 rovere barrique
Arpa 4512 chêne barrique



Arpa 4604 walnut Savoia

Arpa 4604 noce Savoia
Arpa 4604 noyer Savoia

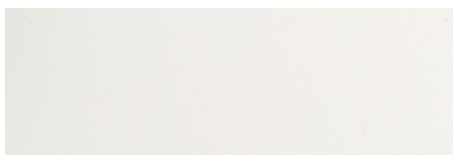

White laminate

Laminato bianco
Stratifié blanc

The colour samples are indicative and are representative only; not intended as an exact replica of the actual colour of the product.
I campioni di colori sono indicativi e si intendono a solo scopo rappresentativo, non devono essere intesi quali riproduzioni esatte del colore effettivo del prodotto.
Les vignettes de couleurs ne sont fournies qu'à titre indicatif et ne sauraient reproduire fidèlement la couleur véritable du produit.

true

STANDARD LAMINATE FINISHES

FINITURE IN LAMINATO STANDARD - FINITIONS STRATIFIÉES STANDARD



001
Bianco




0266
Avorio cisa




0523
Giallo colorado




0775
Rosso falun

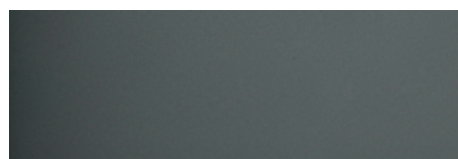


0760
Verde modo

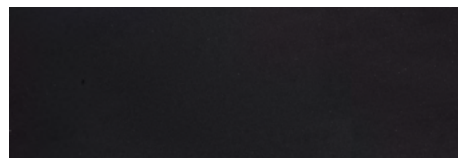

0509
Nero

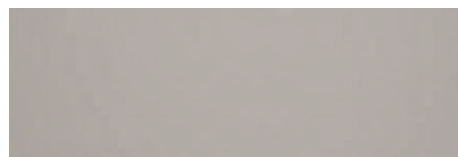

0527
Grigio argento

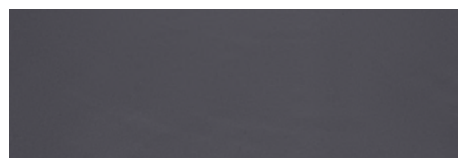

0526
Grigio antracite



0562
Verdone


The colour samples are indicative and are representative only; not intended as an exact replica of the actual colour of the product.
I campioni di colori sono indicativi e si intendono a solo scopo rappresentativo, non devono essere intesi quali riproduzioni esatte del colore effettivo del prodotto.
Les vignettes de couleurs ne sont fournies qu'à titre indicatif et ne sauraient reproduire fidèlement la couleur véritable du produit.

STANDARD FENIX FINISHES


FINITURE IN FENIX STANDARD - FINITIONS STANDARD EN FENIX



Fenix 0032
Bianco Kos

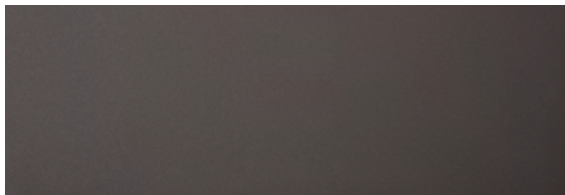

Fenix 0749
Cacao Orinoco

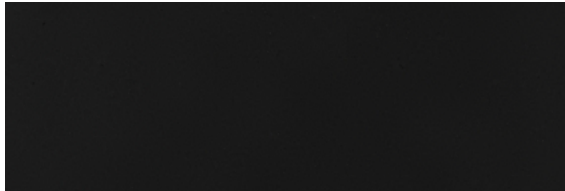


Fenix 0720
Nero ingo

The colour samples are indicative and are representative only; not intended as an exact replica of the actual colour of the product.
I campioni di colori sono indicativi e si intendono a solo scopo rappresentativo, non devono essere intesi quali riproduzioni esatte del colore effettivo del prodotto.
Les vignettes de couleurs ne sont fournies qu'à titre indicatif et ne sauraient reproduire fidèlement la couleur véritable du produit.

STANDARD LINOLEUM FINISHES

FINITURE IN LINOLEUM STANDARD - FINITIONS STANDARD EN LINOLEUM



**Linoleum
charcoal**



**Linoleum
pewter**



**Linoleum
olive**



**Linoleum
pebble**



**Linoleum
mushroom**

The colour samples are indicative and are representative only; not intended as an exact replica of the actual colour of the product.

I campioni di colori sono indicativi e si intendono a solo scopo rappresentativo, non devono essere intesi quali riproduzioni esatte del colore effettivo del prodotto.
Les vignettes de couleurs ne sont fournies qu'à titre indicatif et ne sauraient reproduire fidèlement la couleur véritable du produit.


true

STANDARD MARBLE FINISHES

FINITURE IN MARMO STANDARD - FINITIONS STANDARD EN MARBRE



Carrara Statuarietto

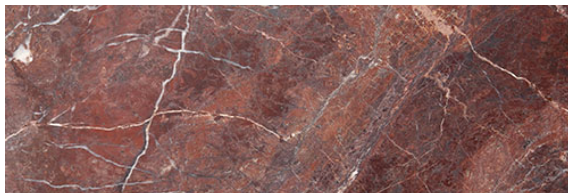

Red Jasper



Travertino Grigio




Verde Alpi

The colour samples are indicative and are representative only; not intended as an exact replica of the actual colour of the product.
I campioni di colori sono indicativi e si intendono a solo scopo rappresentativo, non devono essere intesi quali riproduzioni esatte del colore effettivo del prodotto.
Les vignettes de couleurs ne sont fournies qu'à titre indicatif et ne sauraient reproduire fidèlement la couleur véritable du produit.


true

STANDARD SANTA MARGHERITA FINISHES


FINITURE IN SANTA MARGHERITA STANDARD - FINITIONS STANDARD EN SANTA MARGHERITA

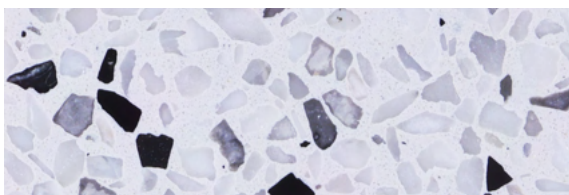


New York

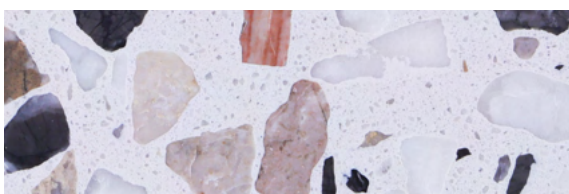

Palazzo Ducale

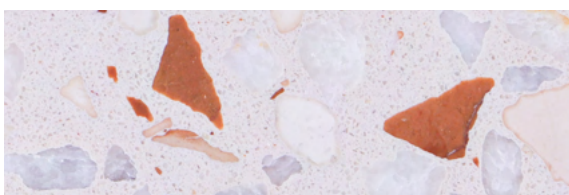

Palazzo Foscari

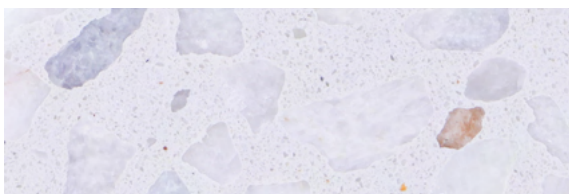

Palazzo Maffei



Palazzo Mazzanti

The colour samples are indicative and are representative only; not intended as an exact replica of the actual colour of the product.

I campioni di colori sono indicativi e si intendono a solo scopo rappresentativo, non devono essere intesi quali riproduzioni esatte del colore effettivo del prodotto.
Les vignettes de couleurs ne sont fournies qu'à titre indicatif et ne sauraient reproduire fidèlement la couleur véritable du produit.

true

STANDARD HPL FINISHES

FINITURE IN HPL STANDARD - FINITIONS STANDARD EN HPL

Indoor




0509
Nero



001
Bianco

Outdoor



0627
Beige



0077
Antracite

The colour samples are indicative and are representative only; not intended as an exact replica of the actual colour of the product.
I campioni di colori sono indicativi e si intendono a solo scopo rappresentativo, non devono essere intesi quali riproduzioni esatte del colore effettivo del prodotto.
Les vignettes de couleurs ne sont fournies qu'à titre indicatif et ne sauraient reproduire fidèlement la couleur véritable du produit.

true

COLOR SWATCHES

The colour samples are indicative and are representative only; not intended as an exact replica of the actual colour of the product.

I campioni di colori sono indicativi e si intendono a solo scopo rappresentativo, non devono essere intesi quali riproduzioni esatte del colore effettivo del prodotto.
Les vignettes de couleurs ne sont fournies qu'à titre indicatif et ne sauraient reproduire fidèlement la couleur véritable du produit.

true

INDEX

manufacturer	collection	category	swatches and tech info
camira	ERA	S	 
FIDIVI	LASER N		 
FIDIVI	MAYA		 
Gabriel	CURA		 
FIDIVI	SEALIFE	T	 
FIDIVI	CORTE		 
SPRADLING®	VALENCIA		 
camira	MAIN LINE FLAX		 
Gabriel	CONTOUR - CONTOUR MELANGE		 
Gabriel	STEP		 
Gabriel	STEP MELANGE		 
kvadrat	FIELD 2	M	 
Gabriel	FOCUS		 
Gabriel	FOCUS MELANGE		 
Gabriel	GRAIN		 
Gabriel	FAME		 
mariosirtori	COIL		 
camira	SYNERGY	F	 
kvadrat	REMIX 3		 
Gabriel	UMBER		 
mariosirtori	LOOP		 
mariosirtori	TWIST		 
mariosirtori	KNOT	L	 
Gabriel	NOBEL		 
DANI	PANAMA GENUINE LEATHER	P	 
Gabriel	CUBIC		 
elmo 	BALTIQUE FULL GRAIN LEATHER	PX	 

true

INDEX OUTDOOR

manufacturer

collection

category

swatches
and tech info

SPRADLING®

MAGLIA



FIFTYSHADES



DIECIELODE

FABTHIRTY



HOME - TINTA UNITA*



* available only for the support bands of "Farfalla"

* disponibile solo per le fasce di supporto di "Farfalla"

* disponible uniquement pour les bandes de soutien "Farfalla"

true


INDOOR

The colour samples are indicative and are representative only; not intended as an exact replica of the actual colour of the product.
I campioni di colori sono indicativi e si intendono a solo scopo rappresentativo, non devono essere intesi quali riproduzioni esatte del colore effettivo del prodotto.
Les vignettes de couleurs ne sont fournies qu'à titre indicatif et ne sauraient reproduire fidèlement la couleur véritable du produit.


true

camira


ERA




CSE30
TRANSITION




CSE31
SPLITSECOND




CSE03
LIFETIME




CSE32
OCCASION




CSE27
MEASURE




CSE25
SEQUENCE




CSE05
SPAN




CSE26
TURN




CSE29
EXPERIENCE




CSE28
EXTENT




CSE19
CALENDAR




CSE24
DATE




CSE06
CYCLE




CSE17
PHASE




CSE09
PRIME




CSE38
ALLOWANCE




CSE08
CHAPTER




CSE12
PERENNIAL




CSE42
RANGE




CSE40
MATURITY




CSE36
NOTATION




CSE37
REST




CSE20
AEON




CSE10
EVERLASTING




CSE15
STAGE




CSE07
PERIOD




CSE34
ENDURANCE



CSE16
TIMELAPSE




CSE18
EVENT




CSE35
SIGNATURE

true







CSE33
ANALOGUE



CSE01
FUTURIST




CSE45
PROMPT



CSE02
GENERATION




CSE23
OCCURENCE




CSE21
HISTORY



CSE46
MEMO




CSE41
QUOTA




CSE11
FORECAST




CSE13
PRESENT




CSE39
YOUTH



CSE43
LATE




CSE44
ELAPSE



CSE14
FORWARD

FIDIVI*

LASER N

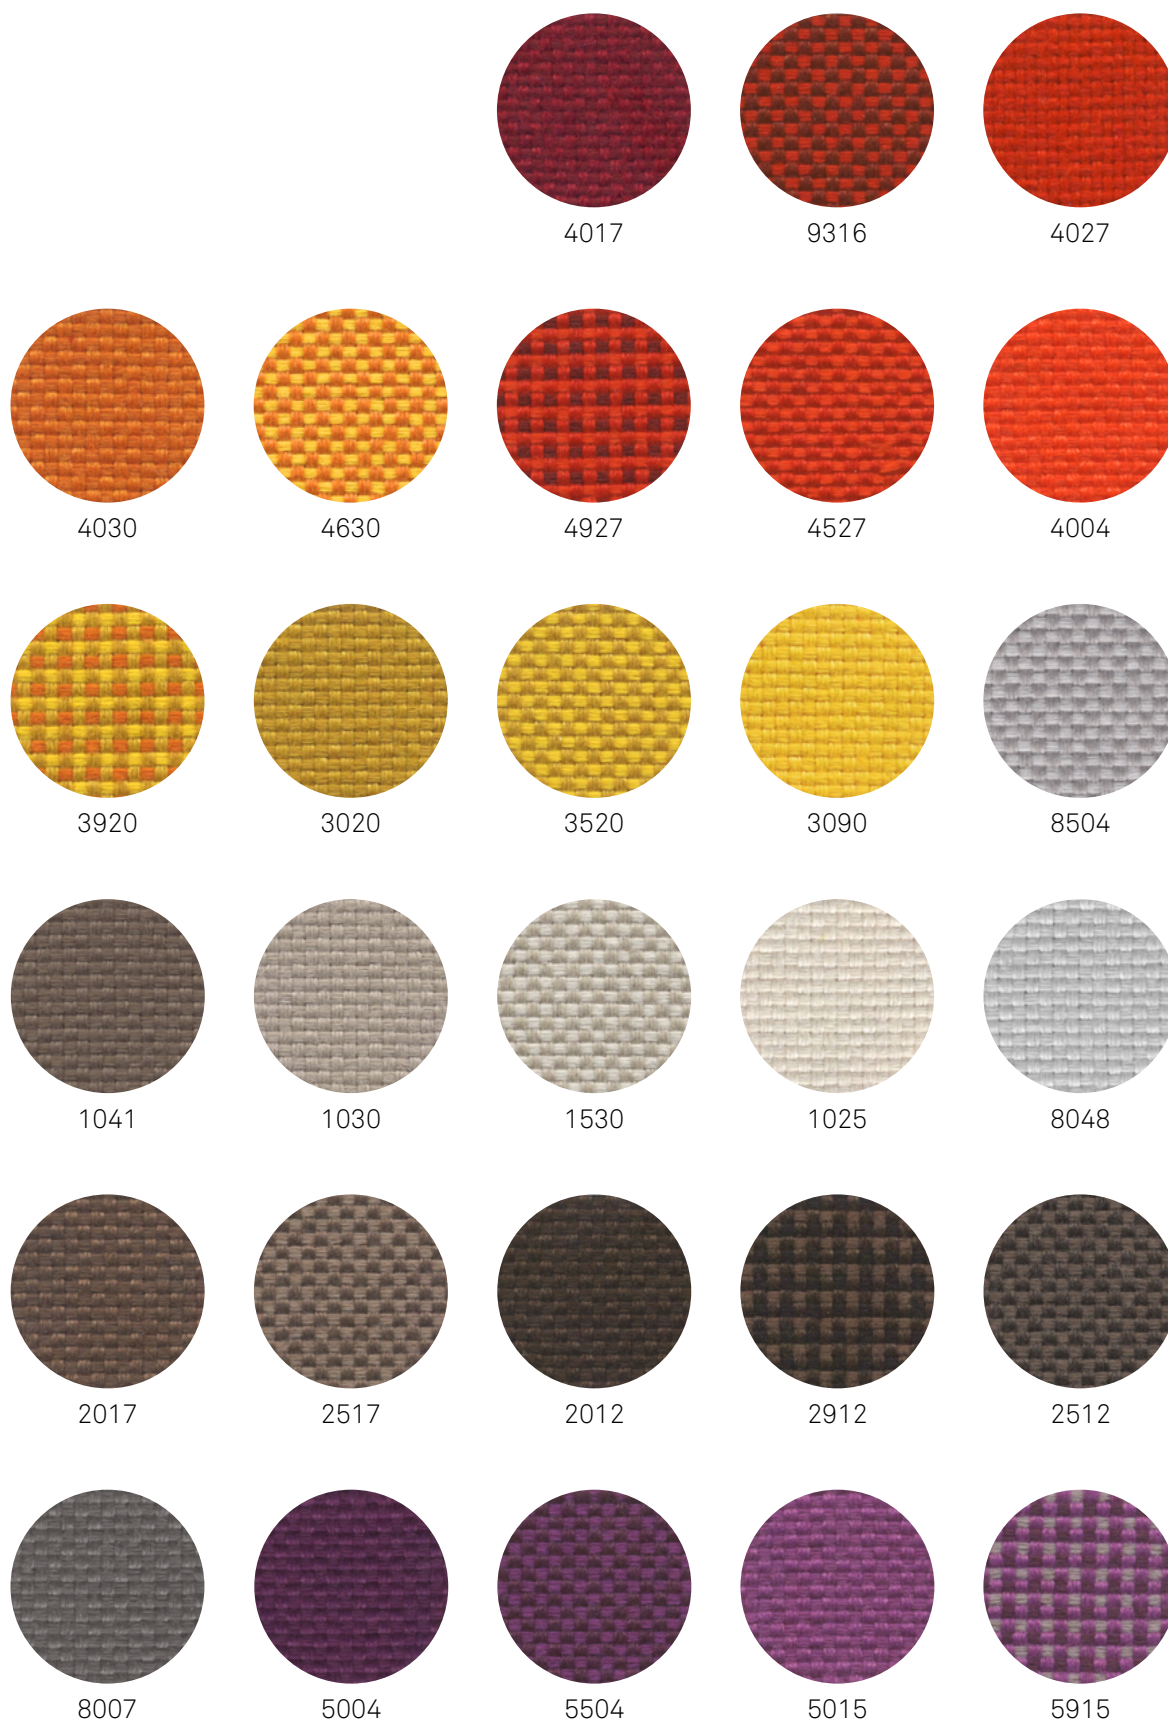


true




FIDIVI*


LASER N




9261




6971




6071




6517




6017




6070




6543




6043




6579




6079




6056




6537




6037




6531




6031




7041




7553




7020




7536




7036




7934




7034




7520




8904




8532




8004




9301



8010



9338



8033

true



FIDIVI*


MAYA




9106



1006



9211




9212




2006




9217




9222




9228




3008




9309




3019




9302



1029




4030




9404




4027




9405




4017




9503




9502




9501




6006




6075



9603



6080




9604

true




FIDIVI*


MAYA




9601




9705




6091




6014




9602




7009




9702




9703




9704




7020




8001




9107




8009




9804



9803




9805



8033


true




60000




61232




62125




60327




60112




61168




62126




61233




66166




60110




61259




62084




61260




66165




60109



61169



62083




61257




60111




60999




60019




62082




61258




64240




63078




64197




64195




66239




63012




64013




64194



65105




64196



64252




65137



66169

FIDIVI*


SEALIFE




2519




2007




1006




1506




3509




3030



3008



4030



4566



4528



4522



4037



4503

true




FIDIVI*


SEALIFE




8033




8517




8532




8032




7029




7521




7525




7033




7504




7530




5592




6075




6591




6546



6080



6512




6524

true




FIDIVI*


CORTE




9407




9412




9515




9304




9312




9443




9343




9390



9216




9212




9225



9217



9210




9104

true




FIDIVI*


CORTE




9625




9607




9612




9617




9604




9615




9731



9742




9712




9743




9717




9715




9807



9825




9806



9816

true




107-9607
PURE WHITE




107-8020
PEARLESCENCE



107-8032
WEISS




107-1048
SISAL




107-1049
LEINEN




107-1020
IVORY




107-1001
CHAMPAGNE



107-1050
BEIGE



107-2117
CASHMERE



107-0002
COGNAC




107-0033
BUCHE




107-0001
PRALINÉ




107-4041
METEOR



107-9001
SUMATRA



107-4001
MUSHROOM




107-0034
TAUPE




107-4044
WARM GREY




107-2522
FUNGI




107-4040
AUSTER




107-8415
MISTY




107-6438
EUCALYPTUS



107-5451
PINE



107-8438
CACTUS




107-4002
LAUREL



107-5002
MOSS




107-2115
CHESTNUT




107-0035
TERRACOTTA



107-6003
NECTARINE




107-6019
ORANGE




107-6013
MELONE




107-2116
CAMEL




107-2111
SQUASH



107-6012
SAFRAN



107-2020
SONNE




107-2110
AVOCADO



107-5041
APFEL




107-5001
OLIVE




107-5069
GRÜN




107-2119
TEAL




107-0337
SCUBA




107-5057
TÜRKIS




107-5056
JADE



107-3001
LAVENDEL



107-3067
DELFT




107-3069
BALTIC




107-3068
MARINE




107-2108
NIGHT




107-0370
AZURE



107-5065
PETROL



107-4042
TITAN




107-2107
SKYLIGHT




107-2106
CORAL




107-2008
EVEREST




107-5032
CLOUD



107-4020
SILVER



107-4045
PERLE




107-4052
LICHTGRAU



107-4043
PLATIN



107-4003
GRAPHITE




107-9035
SCHWARZ




107-7001
AMETHYST




107-2002
BERRY




107-2021
PINK




107-9245
PEACH




107-2114
ROSÉ




107-2113
LOTUS




107-2112
TOMATO



107-2075
ROT



107-2074
KIRSCH




107-2062
PORT




107-2001
MERLOT




107-0020
MOCCA




MLF43
ALPERTON




MLF08
LAMBETH




MLF13
LEYTON




MLF44
BALHAM




MLF45
BARKING



MLF01
ALDGATE




MLF06
KILBURN




MLF14
PARSONS




MLF46
BLACKWALL




MLF40
NORTHFIELDS




MLF03
BARBICAN




MLF47
BRIXTON




MLF48
CHIGWELL




MLF50
EMBANKMENT




MLF36
TOWER




MLF21
WATERLOO




MLF51
EPPING




MLF49
CLAPHAM




MLF35
BROMPTON




MLF19
VICTORIA




MLF22
WESTMINSTER




MLF24
BAYSWATER




MLF37
STANMORE




MLF34
PIMLICO




MLF05
HOLBORN




MLF10
NEWBURY




MLF09
MONUMENT




MLF52
GREENWICH




MLF25
BETHNAL




MLF54
HARROW




MLF55
HORNCHURCH




MLF53
HAMPSTEAD




MLF32
GREENFORD




MLF57
MOORGATE




MLF18
TUFFNELL




MLF29
FARRINGDON




MLF56
KENTISH




MLF67
WOODFORD




MLF31
GOLDHAWK




MLF17
TOOTING



MLF59
PERIVALE




MLF15
STOCKWELL



MLF07
KENSINGTON




MLF20
UPMINSTER




MLF12
MORDEN



MLF60
PINNER



MLF23
BANK



MLF02
ARCHWAY




MLF61
REDBRIDGE




MLF26
CAMDEN



MLF62
RICHMOND




MLF16
TEMPLE



MLF63
SHADWELL



MLF64
STRATFORD




MLF65
WATFORD




MLF66
WHITECHAPEL




MLF28
EDGWARE




60360




61304




63145




60359




61303




63144



60358




62150




61302




60998




62147




64277




66276




63143




64283




66271




64276




64279




66275




64278




66270




68314




68317




68313




68308




67138




68312



68307



67139



68311




60745



61787



61788




60004



61149




61793




66152




61789



60011



66148




60091



61791




66765




60092




60090




60999




66019




60021




63736




63739




64178




64767




63082




64179




62744




63738



64013



62746




63012




64159



62057




63075




65047




61103




64770




65023




66151




67004




60746




66150




67735




67072




66149




66018




67073



65018




66763




67007



65011



66764




68158



61104




61286




60345



61287




61288




60004




61149




61293



66152



61289



60011




66265




61152




61291




66148




66019



60092




60090




60021




62143



64267




61151




63075



63136




63139




64178



62144




63082




64179




62146




63138



64013



62057



63137




64159




61103




64270




65023




65047




66151




67004




60346




66150




67135




67072




66149




66018



65018




66263




67007




65011




66264




68158




68118




68163




68159




68162




68119




68120



68298



62073




68161




68299




68301



68121



68300




68165




463




663




443




623




643




843




343




673




662




242




132




373




182



173



693




733




222




233




123




763




723




142




782




793




192




943




963



773



983



933



60999



61037



61244



65033



60200




61039



61036



65032



60212




61248




61035




64044



60211



62018



64041



64043



60210



63133




64045



60209




66011



60008




68048




68049




61043




66023



66010




68047




68250



61042




66022




66021




61040



66020




60999




61242




61235



64244




60900




61237




61236



64243




60312




61239




64242




65132




60311




61238




64241



65133



60310



62118




63112



64245




60309




62117




66211




60308




68248




68247




61241




66224




66210




68249




68246




61240




66223




66221




68234




68235




61243




66222




66220




68244




68245




66209



66219



61250




61229



61251



61247



61252



61230




61146



61253




61248




61249



60300




60302




60301




60320




60322



60321




60303




60324




60999



60323




60325



60328




64249



64041



64250



64251




61256




62016



63117




61254




62121




63118




66236




66237




66234




66216




66232




66235




66231




66233




68243




68257



62122




68259



68258




62123



68155



61037



68260




61255

Gabriel


FAME




60005




61136




63077




64169




60078




61135




61003




63016




64165




60003




61060




61131




63078




64166




61133




63076




64168




64119




60017




60019




61047




64167




64089




60999




60051



61044




61108




64058

true







66130




67068




65081




65083




66118




66133




65082




65084




66131




67016




64055




66005




66075




67004




66132




66061




66032




66071




68145




62067




68147



68144




62068




67067




68035




68004




67069




68146




68148



67005



68143




61134



05



06



01




07



02



03



10



11




04




08



09




LDS23
BRACKET




LDS45
SUMMON



LDS28
LATERAL




LDS44
RELATE




LDS43
MARRY



LDS18
LOOP




LDS22
FRAME




LDS76
SUCCESS




LDS37
LINEA




LDS39
COLLECTIVE




LDS74
AFFINITY




LDS75
CONTRIBUTION




LDS73
WORK




LDS77
COMBO




LDS78
CORDIAL




LDS83
CONGREGATE




LDS82
LIKENESS




LDS81
SIMILAR




LDS84
MUTUAL




LDS86
GLOBAL




LDS71
OPEN




LDS80
APT



LDS85
SHARE



LDS87
VALUES




LDS79
AMIABLE




LDS07
FATE



LDS72
COMPOSE




LDS36
MEDLEY




LDS70
TOGETHER




LDS88
PROCESS




LDS05
VENTURE




LDS66
FELLOWSHIP




LDS67
WARMTH




LDS68
COLLABORATE




LDS61
ASSEMBLE




LDS65
HUDDLE



LDS64
ORDER




LDS63
GUILD




LDS62
ALIKE




LDS69
SYNC




LDS55
SUPPORT




LDS56
KINSHIP




LDS57
ENGAGE




LDS58
FAMILY




LDS38
UNITY




LDS52
COMPLY




LDS51
KINDNESS




LDS50
LEAGUE




LDS59
GROUP




LDS60
ACCORD




LDS54
REGARD



LDS53
PACT




LDS47
INTEGRATE



LDS41
COUPLE




LDS26
BRIDGE




LDS46
GATHER




LDS49
APPEND



LDS48
INTERFUSE



LDS42
INTERTWINE



LDS40
CO-OPERATE



LDS19
CHAIN




LDS33
TAG




LDS34
WED




LDS32
AFFIX



LDS08
SERENDIPITY




LDS16
PARTNER




LDS17
MIX




LDS20
LEVEL




LDS31
PAIR




LDS35
CHEMISTRY




LDS29
HOOK




LDS21
TEAM



LDS24
BOND




LDS25
COMPOUND




LDS27
SEEK

kvadrat


REMIX 3




152




163




276




286




133




143



173




113




123




196



183




842




906




912



923




954




962




982




933



942




412




996



973



672




362

true



kvadrat


REMIX 3




346




326




242




356




233



223



126



136




393




682




266



296



406



686



606



433



252




783




692



383



422




452

true




kvadrat

REMIX 3




866



836



733




823




773



796




743




816




753




722




762




716



516



852




873




632



543



536



612



373



653



443



643



566



662

true







61276



61265




60335



61277




62135




60336




61273




62139




60337




61274




62137




60999




61275




63128




64256




64258




62138




64257




64259




61279



63129




64260




61278




64261




67129




66251



67130




66252




68278




68281




66244




68279




68282



66253



68280



68267



01



02




04



05



06



08



07



03



01



04




02



03



05



08



06



07



09



01



02



03



04



05



09



06



10




11




08



07




60348




60347



61298




60350




60349




61299



60352



60351




60353



60999




60355




60354




61290




62136



61295



63141



64271



61296



61301



64272




61297



61300




65145




66267




68303



66266




67136



68302



66268



68304

DANI

PANAMA GENUINE LEATHER



5000




5518



5506



5480



5030




5020




5060



5050




5070




5500



5370




5200




5210




5460




5220




5410




5240



5250




5526




5230




5310




5290



5160



5150



5418



5504




5400



5524



5340



5350

true



DANI

PANAMA GENUINE LEATHER



5010




5508



5528



5426




5320




5080




5100



5110



5090




5414




5406




5270




5431




5260




5300




5428




5416



5420



5280



5402



5120



5130



5140




5502




5522



5360




5390



5430



5450




5470

true







63127




63057




61269




65142




64255




64117




67043




66140




66249




68277




68274




68275




60999




60025




60011




60095



61271



61270



61128



02001




12036



33037




33280



33441




43001




43003




44038




53001



55053



88042



88054



91035



93002



93347



95052




95442




97001



97055



97056



98001



99011


OUTDOOR

The colour samples are indicative and are representative only; not intended as an exact replica of the actual colour of the product.
I campioni di colori sono indicativi e si intendono a solo scopo rappresentativo, non devono essere intesi quali riproduzioni esatte del colore effettivo del prodotto.
Les vignettes de couleurs ne sont fournies qu'à titre indicatif et ne sauraient reproduire fidèlement la couleur véritable du produit.


true




MAG-6017
ARCTIC




MAG-6031
ASH




MAG-6024
MONOCHROME




MAG-6016
THUNDER




MAG-6032
BLACKCAVE




MAG-6018
OAK




MAG-6025
GINGER




MAG-7026
GRANITE




MAG-4537
TRUFFLE




MAG-6019
GRIZZLY




MAG-2000
PRIMROSE




MAG-6020
MAUI




MAG-0406
SAGE




MAG-8022
SAFARI




MAG-3616
EARTH




MAG-2003
SKY




MAG-2420
SERENITY




MAG-6443
GREENLAND




MAG-6021
FJORD




MAG-0031
ARMORY




MAG-5001
UYUNI




MAG-6022
SVALBARD




MAG-6023
KYANITE




MAG-6028
MINUIT




MAG-6027
TAHOE




MAG-5559
INDIGO




MAG-0003
BREEZE




MAG-4008
ALASKA




MAG-1702
DOVETAIL




MAG-5450
MIDNIGHT




MAG-8056
URBAN




MAG-4203
BLOSSOM




MAG-6029
HIVE



MAG-6026
MAPLE




MAG-4227
MARS




MAG-6030
AÇAÍ




30320-001
BIANCO




30320-002
MADREPERLA




30320-003
PIETRA



30320-004
ARGILLA



30320-005
SABBIA




30320-006
BEIGE




30320-007
VISONE



30320-008
TALPA




30320-009
LEGNO




30320-010
MARRONE




30320-011
NERO




30320-012
SALE-PEPE




30320-013
FUMO




30320-014
ANTRACITE




30320-015
GRIGIO




30320-016
ARGENTO




30320-017
PERLA




30320-018
ARANCIO




30320-019
RUGGINE




30320-020
CORALLO




30320-021
ROSA




30320-022
PESCO



30320-023
GLICINE




30320-024
LIMONE




30320-025
GIALLO




30320-026
ORO




30320-027
CIELO




30320-028
ACQUAMARINA




30320-029
LAGUNA




30320-030
ACQUA




30320-031
TURCHESI




30320-032
TEAL BLU




30320-033
OTTANIO




30320-034
OLTREMARE




30320-035
BLUETTE




30320-036
COPIATIVO




30320-037
BLU




30320-038
NOTTE




30320-039
SMERALDO




30320-040
BILIARDO




30320-041
MENTA




30320-042
ALGA




30320-043
CHARTREUSE




30320-044
ROSSO



30320-045
LACCA




30320-046
PETUNIA




30320-047
FUXIA




30320-048
AMETISTA




30320-049
RUBINO




30320-050
BORDEAUX



30316-001
AVORIO




30316-002
CORDA



30316-003
GRIGIO




30316-004
NERO




30316-005
BLU




30316-006
PERVINCA




30316-007
ACQUA



30316-008
GIALLO



30316-009
CORALLO




30316-010
ROSSO




30319-001
BIANCO




30319-002
AVORIO



30319-003
SABBIA



30319-004
PIETRA



30319-005
ARGILLA




30319-006
CIPRIA




30319-007
NUVOLA




30319-008
ARGENTO




30319-009
GRIGIO




30319-010
SALE-PEPE




30319-011
ANTRACITE




30319-012
ARANCIO




30319-013
RUGGINE




30319-014
CORNIOLO




30319-015
ROSA




30319-016
PESCO




30319-017
GIALLO




30319-018
ALGA




30319-019
VERDE




30319-020
PRATO




30319-021
TIFFANY




30319-022
ACQUA




30319-023
TEAL BLU




30319-024
BLU




30319-025
NOTTE




30319-026
GLICINE




30319-027
GENOA



30319-028
PETUNIA



30319-029
ROSSO




30319-030
BORDEAUX

HOME - TINTA UNITA*

* available only for the support bands of "Farfalla"

* disponibile solo per le fasce di supporto di "Farfalla"


* disponible uniquement pour les bandes de soutien "Farfalla"



986/2



24



81



930




926




929




16




7



75



426/15



98



19

**INDOOR
TECHNICAL FEATURES**

true



Era - Product information

CSE (TSR12) 0522 CP



Task seating



Soft seating



Cigarette & Match



Washable



Bleach cleanable



Acoustic



Year guarantee

With Treatment



Medium Hazard

Era is a subtle, two tone polyester fabric containing stretch in both directions for ease of upholstery. The baby herringbone weave offers an understated contemporary texture while its colouring technique provides close up intrigue. The palette incorporates playful brights and sophisticated muted tones.



STANDARD 100
11-43686
Shirley

www.oeko-tex.com



Technical information

UK

Composition
100% Polyester

Environment
Certified to STANDARD 100 By OEKO-TEX®
Certified to Indoor Advantage™ Gold
Non metallic dyes/tints

Width
140 cm minimum

Weight
320 g/m² ±5% (448 g/lin.m ±5%)

Abrasion Resistance*
Heavy duty / 10 year guarantee
Independently certified to ≥100,000 Martindale cycles

Flammability
EN 1021 - 1 (cigarette)
EN 1021 - 2 (match)
BS 7176 Low Hazard
EN 13501-1 Adhered Class B, s1, d0
EN 13501-1 Un-adhered Class C, s1, d0
Optional: Please specify when ordering:
BS 5852 Ignition Source 5 with EnviroFlam5
BS 7176 Medium Hazard with EnviroFlam5
The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK domestic cigarette and match) with EnviroFlam5
Note: Flammability performance is dependent on components used. Our certificates show what substrates have been used in our tests. For composite tests customers must ensure their complete furniture meets the necessary standards.

Light Fastness
5 (ISO 105 - B02)

Fastness to Rubbing
Wet, 4, Dry, 4 (ISO 105 - X12)

Acoustic Properties
Acoustically transparent, acoustic graphs available upon request.

Bleach Cleanable
ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution

Cleaning
Vacuum regularly. Wipe with a damp cloth using a proprietary upholstery shampoo/ soap. For deeper cleaning use steam, bleach, alcohol or professionally dry clean. Can be washed at 60°C. Full details can be found in our cleaning and disinfection guide.

*Abrasion testing produces a wide variability of results even from the same test sample. The independent certificate of ≥100,000 cycles is available on our website or from our customer service team. Internally we also specify this product at >100,000 cycles which we believe is realistic for repeatability of testing. Please be aware that abrasion testing alone is not a reliable indicator of the actual wear performance of fabrics. We're so confident in the durability of our products that we provide a robust 10 year guarantee (full details available). Please note that seam performance is dependent on seam construction and needle and thread type. We recommend that appropriate sewing advice be taken. Batch to batch variations in shade may occur within commercial tolerances. We reserve the right to alter technical specifications without notice. The Unregistered Design Rights and the Copyright in all designs are the exclusive property of Camira Fabrics Limited.

D

Zusammensetzung
100% Polyester

Umweltfreundlich
Nach Zertifikat STANDARD 100 By OEKO-TEX®
Nach Zertifikat Indoor Advantage™ Gold
Nicht schwermetallhaltige Farbstoffe

Breite
140 cm nutzbare Breite

Gewicht
320 g/m² ±5% (448 g/lfd.m ±5%)

Scheuerfestigkeit*
Schwerer Objekteintritt / 10 Jahre Garantie
Extern zertifiziert mit ≥100,000 Scheuertouren Martindale

Feuersicherung
EN 1021 - 1 (Zigarettenstest)
EN 1021 - 2 (Streichholztest)
BS 7176 Low Hazard
EN 13501-1 Adhered Class B, s1, d0
EN 13501-1 Un-adhered Class C, s1, d0
Bitte bei Auftragserteilung angeben:
BS 5852 Ignition Source 5 mit EnviroFlam5
BS 7176 Medium Hazard mit EnviroFlam5
The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK Wohnmöbel Zigarettenstest und Streichholztest) mit EnviroFlam5
Bemerkung: Die Schwerentflammbarkeit hängt von den verwendeten Komponenten ab. Unsere Zertifikate zeigen auf, welche Substrate bei den Tests verwendet wurden. Bei Verbundtests muss sichergestellt sein, daß das komplette Möbel den entsprechenden Standards entspricht.

Lichtechtheit
5 (ISO 105 - B02)

Reibechtheit
Nass: 4, Trocken: 4 (ISO 105 - X12)

Akustische Eigenschaften
Akustisch durchlässig, akustische Messwerte auf Anfrage.

Chlorbleiche-Bestandig
ISO 105 E03 Farbänderung 4 bei einer 1:4 verdünnten Chlor-Lösung

Reinigung
Regelmässig absaugen. Mit einem feuchten Tuch abwischen oder mit einem geeigneten Polstershampoo behandeln. Für eine Grundreinigung bitte Dampf, Chlorbleiche, Alkohol oder professionelle Trockenreinigung verwenden. Kann bei 60°C gewaschen werden. Weitere Informationen finden Sie in unserem Leitfaden zur Reinigung und Desinfektion.

*Die Scheuerfestigkeitsprüfung ergibt selbst bei gleichen Testmustern stark abweichende Ergebnisse. Das Zertifikat eines unabhängigen Prüfinstituts über ≥100,000 Scheuertouren erhalten Sie von unserem Vertriebsinnendienst oder auf unserer Webseite. Intern spezifizieren wir auch dieses Produkt mit >100,000 Scheuertouren, die in der Serienfertigung als realistisch angenommen werden. Bitte nehmen Sie zur Kenntnis, dass die Scheuerfestigkeitsprüfung allein keine Aussagekraft über die Langlebigkeit eines Bezugsstoffes hat. Wir sind von der Langlebigkeit unserer Produkte überzeugt und bieten daher 10 Jahre Garantie (Details auf Anfrage). Eine optimale Nahtausreissfestigkeit hängt von der Nahtfahne, der verwendeten Nadel und dem Näh-Garn ab. Wir empfehlen daher Nähverusche durchzuführen. Handelsübliche Farbabweichungen können auftreten und berechtigen nicht zur Reklamation. Wir behalten uns die Änderung technischer Spezifikationen vor. Die registrierten und nicht registrierten Urheberrechte der Dessinierungen sind ausschliessliches Eigentum der Camira Fabrics Limited.

F

Composition
100% Polyester

Écologique
Certifié à STANDARD 100 By OEKO-TEX®
Certifié à Indoor Advantage™ Gold
Teintures non métalliques

Largeur
140 cm minimum

Poids
320 g/m² ±5% (448 g/m.l ±5%)

Résistance à l'abrasion*
Usage intense / garantie 10 ans
Certificat indépendant ≥100,000 cycles
Martindale

Flammabilité
EN 1021 - 1 (cigarette)
EN 1021 - 2 (allumette)
BS 7176 Low Hazard
EN 13501-1 Adhered Class B, s1, d0
EN 13501-1 Un-adhered Class C, s1, d0
Prière de le mentionner lors de la commande:
BS 5852 Ignition Source 5 avec EnviroFlam5
BS 7176 Medium Hazard avec EnviroFlam5
The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK domicile cigarette et allumette) avec EnviroFlam5
Note: La performance de flammabilité dépend des composants utilisés. Nos certificats indiquent les substrats utilisés dans nos tests. Pour les tests composites, les clients doivent s'assurer que leurs meubles complets satisfont aux normes nécessaires.

Solidité à la lumière
5 (ISO 105 - B02)

Solidité au Frottement
Mouillé: 4, Sec: 4 (ISO 105 - X12)

Propriétés Acoustiques
Acoustiquement transparent, graphiques acoustiques disponibles sur demande.

Nettoyable au javel
ISO 105 E03 changement de couleur 4 pour le facteur de dilution 1: 4 solution de chlore

Nettoyage
Passez l'aspirateur régulièrement. Essuyez avec un chiffon humide en utilisant un shampoing/savon pour tissus d'ameublement exclusif. Pour un nettoyage en profondeur, utilisez la vapeur, javel, alcool ou un nettoyage à sec professionnel. Peut être lavé à la machine, programme maximum 60°C. Vous trouverez tous les détails dans notre guide de nettoyage et de désinfection.

*Les tests de résistance à l'abrasion proposent une large variété de résultat final, parfois sur le même échantillon de tissu. Le certificat indépendant de ≥100,000 cycles est disponible sur notre site internet; vous pouvez également contacter notre Service Clients. Nous validons également ce produit - en interne - à >100,000 cycles; ce qui est, d'après nous, plus réaliste dans le but d'obtenir une continuité égale des résultats de tests. Merci de noter que l'abrasion seule ne constitue pas un indicateur de confiance dans la performance du tissu à long terme. Nous avons une confiance absolue en nos produits et leur durabilité, c'est pour cela que nous vous offrons une garantie robuste de 10 ans. Veuillez noter que la performance du joint dépend de sa construction ainsi que de l'aiguille et du type de fil utilisés. Une variation de couleurs peut provenir (commerciallement tolérable). Nous réservons le droit de changer les spécifications techniques sans préavis. Les Droits de Conception non-enregistrés et les droits d'auteur de tous les motifs sont la propriété exclusive de Camira Fabrics Limited.

ES

Composición
100% Poliéster

Ambiental
Certificado de STANDARD 100 By OEKO-TEX®
Certificado de Indoor Advantage™ Gold
Tintes no metálicos

Ancho
140 cm mínimo

Peso
320 g/m² ±5% (448 g/lin.m ±5%)

Resistencia a la abrasión*
Garantía de 10 años con uso intenso
Independientemente del certificado de ≥100,000 Ciclos Martindale

Inflamabilidad
EN 1021 - 1 (cigarrillo)
EN 1021 - 2 (cerilla)
BS 7176 Low Hazard
EN 13501-1 Adhered Class B, s1, d0
EN 13501-1 Un-adhered Class C, s1, d0
Por favor especificar cuando se requiere en el pedido:
BS 5852 Ignition Source 5 con EnviroFlam5
BS 7176 Medium Hazard con EnviroFlam5
The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK doméstico cigarillo y cerilla) con EnviroFlam5
Note: El rendimiento de la inflamabilidad depende de los componentes usados. Nuestros certificados muestran qué substratos se han usado en nuestros tests. Para tests compuestos nuestros clientes deben asegurar si sus muebles cumplen la normativa al uso.

Solidez a la luz
5 (ISO 105 - B02)

Solidez al rozamiento
Húmedo: 4, Seco: 4 (ISO 105 - X12)

Acústico Propiedades
Acústicamente transparente, gráficos disponibles bajo petición.

Posibilidad lavado con Lejía
ISO 105 E03 cambio color 4 para un factor de disolución 1:4 solución cloro


Limpieza
Uso aspirador regularmente. Limpiar con un trapo usando jabón y agua o producto limpieza para tapicerías. Para una limpieza más profunda usen vapor, lejía, alcohol o limpieza en seco. Se puede lavar a 60°C. Los detalles completos se encuentran en nuestra guía de limpieza y desinfección.

*Los Test de Abrasión producen unos resultados muy variables incluso con la misma muestra. El certificado de ≥100,000 ciclos Martindale está disponible en nuestra web o se puede pedir al Departamento Comercial. Internamente también certificamos este producto >100,000 ciclos, que pensamos que es lo más realista posible en este caso, con una repetición de resultados tan dispares. Tengan en cuenta que el Test de Abrasión solo no es un indicador fiable sobre el desgaste de un tejido. De hecho, estamos tan convencidos en la durabilidad de nuestros tejidos, que ofrecemos una garantía de 10 años (detalles completos disponibles). Tenga en cuenta que el rendimiento de la costura depende de la construcción de la costura, además de la aguja y del tipo de rosca. Le recomendamos que se aconsejen para coser la costura. Las variaciones de lote a lote en la sombra se puede producir dentro de tolerancias comerciales. Nos reservamos el derecho a efectuar modificaciones técnicas sin previo aviso. Los derechos sobre los diseños no registrados y los derechos de autor en todos los diseños son propiedad exclusiva de Camira Fabrics Limited.


www.camirafabrics.com



	CARATTERISTICHE PRINCIPALI - PRINCIPAL CHARACTERISTICS CARACTERISTIQUES PRINCIPALES - HAUPT EIGENSCHAFTEN	Date 14/01/2015 Edition 04
---	--	-------------------------------

Caratteristica Characteristic Caractéristique Charakterdarsteller	Norma Norm Norme Norm	Tolleranza Tolerance Tolérance Toleranz	Dichiarato Declared Déclaré Deklariert	LASER N
Peso (g/ml) – Weight (g/lm) Poids (g/ml) - Gewicht (g/lm)	EN 12127	± 5 %	480	
Peso (g/m²) - Weight (g/m²) Poids (g/m²) - Gewicht (g/m²)	EN 12127	± 5 %	340	
Altezza (cm) - Width (cm) Largeur (cm) - Breite (cm)	-----	± 2 %	140	
Resistenza all'abrasione (cicli) Abrasion resistance (rubs) Résistance à l'abrasion (tours) Scheuerfestigkeit (Scheuertouren)	ISO 12947-2 (Martindale)	± 10 %	100000	
Solidità del colore alla luce (scala dei blu) Light fastness (blue scale) Solidité à la lumière (échelle des bleu) Lichtechtheit (Blaumaßstabe)	ISO 105-B02 (Xenotest)	da 5 a 8	6	
Solidità del colore allo sfregamento (scala dei grigi) Fastness to rubbing (grey scale) Solidité au frottement (échelle des gris) Reibechtheit (Graumaßstabe)	ISO 105-X12 (Crockmeter)	da 4 a 5	4/5	
Pilling (2000 cicli) - Pilling (2000 rubs) Pilling (2000 tours) - Pilling (2000 scheuertouren)	ISO 12945-2	da 4 a 5	5	
Composizione Composition Composition Zusammensetzung	100% POLIESTERE TREVIRA CS 100% POLYESTER TREVIRA CS 100% POLYESTER TREVIRA CS 100% POLYESTER TREVIRA CS			
Leggere differenze di colore tra un lotto e l'altro sono da considerarsi normali Slight colour differences between one lot and another have to be considered within commercial tolerance Légères différences de couleur entre un lot et l'autre doivent être considérés comme étant normales Leichte Farbunterschiede sind zwischen zwei Partien als normal zu betrachten				
Reazione al fuoco – Flammability - Classement au feu – Feuersicherung				
UNI 9174 - 8456 Class C1 UNI 9175 Class 1 IM DIN 4102 Class B1 NF 92501-7 Class M1 NF D 60013 Class AM18 EN 1021-1 & 2 BS Crib 5 BS 7176 Class Medium Hazard EN 13773 Class 1 OENORM 3800-1 Class B1,Q1,TR1 California TB117 USA NFPA 701 USA NFPA 260 IMO Part 8 Upholstery	Altri test fuoco possono essere superati, il superamento di alcuni test fuoco può dipendere dalla schiuma utilizzata Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used Autres tests feu peuvent être passés. La performance au feu dépend de la mousse utilisée Wird auch andere Brandschutzstandards erfüllen. Die flammhemmende Leistung ist anhängig von dem verwendeten Schaum			
Manutenzione e lavaggio – Cleaning and washing – Nettoyage et lavage – Reinigung und waschen				
				
				

	CARATTERISTICHE PRINCIPALI - PRINCIPAL CHARACTERISTICS CARACTERISTIQUES PRINCIPALES - HAUPT EIGENSCHAFTEN	Date 14/01/2015 Edition 01
---	--	-------------------------------

Caratteristica Characteristic Caractéristique Charakterdarsteller	Norma Norm Norme Norm	Tolleranza Tolerance Tolérance Toleranz	Dichiarato Declared Déclaré Deklariert	MAYA
Peso (g/ml) – Weight (g/lm) Poids (g/ml) - Gewicht (g/lm)	EN 12127	± 5 %	590	
Peso (g/m²) - Weight (g/m²) Poids (g/m²) - Gewicht (g/m²)	EN 12127	± 5 %	420	
Altezza (cm) - Width (cm) Largeur (cm) - Breite (cm)	-----	± 2 %	140	
Resistenza all'abrasione (cicli) Abrasion resistance (rubs) Résistance à l'abrasion (tours) Scheuerfestigkeit (Scheuertouren)	ISO 12947-2 (Martindale)	± 10 %	100000	
Solidità del colore alla luce (scala dei blu) Light fastness (blue scale) Solidité à la lumière (échelle des bleu) Lichtechtheit (Blaumaßstabe)	ISO 105-B02 (Xenotest)	da 5 a 8	6	
Solidità del colore allo sfregamento (scala dei grigi) Fastness to rubbing (grey scale) Solidité au frottement (échelle des gris) Reibechtheit (Graumaßstabe)	ISO 105-X12 (Crockmeter)	da 4 a 5	4/5	
Pilling (2000 cicli) - Pilling (2000 rubs) Pilling (2000 tours) - Pilling (2000 scheuertouren)	ISO 12945-2	da 4 a 5	5	
Composizione Composition Composition Zusammensetzung	100% POLIESTERE TREVIRA CS 100% POLYESTER TREVIRA CS 100% POLYESTER TREVIRA CS 100% POLYESTER TREVIRA CS			
Leggere differenze di colore tra un lotto e l'altro sono da considerarsi normali Slight colour differences between one lot and another have to be considered within commercial tolerance Légères différences de couleur entre un lot et l'autre doivent être considérés comme étant normales Leichte Farbunterschiede sind zwischen zwei Partien als normal zu betrachten				
Reazione al fuoco – Flammability - Classement au feu – Feuersicherung				
UNI 9174 - 8456 Class C1 UNI 9175 Class 1 IM DIN 4102 Class B1 NF 92501-7 Class M1 NF D 60013 Class AM18 EN 1021-1 & 2 BS Crib 5 BS 7176 Class Medium Hazard EN 13773 Class 1 OENORM 3800-1 Class B1,Q1,TR1 California TB117 USA NFPA 701 USA NFPA 260 IMO Part 8 Upholstery	Altri test fuoco possono essere superati, il superamento di alcuni test fuoco può dipendere dalla schiuma utilizzata Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used Autres tests feu peuvent être passés. La performance au feu dépend de la mousse utilisée Wird auch andere Brandschutzstandards erfüllen. Die flammhemmende Leistung ist anhängig von dem verwendeten Schaum			
Manutenzione e lavaggio – Cleaning and washing – Nettoyage et lavage – Reinigung und waschen				
				
				

M0406 rev 02 del 07-01-2015

PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2480 / 2544 — Cura

Application

Upholstery

Composition

100% Post-consumer recycled polyester

Weight

420 g/lm — 13.55 oz/lin.yd

Width

140 cm — 55 inches



ENVIRONMENT

Environment, health, and safety[OEKO-TEX® STANDARD 100](#)[EU Ecolabel](#)

Meets Möbelfakta requirements

VOC emission[Ansi/Bifma VOC test MZ1](#)**Life Cycle Assessment (LCA)**[LCA Summary Report](#)

PERFORMANCE

Abrasion

100,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-8 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability[BS EN 1021 1&2 Cigarette and Match](#)[CA TB 117-2013](#)[ASTM E 84 Class 1\(Adhered\)](#)[BS 5852 Crib 5 \(option flame retardant\)](#)[Class Uno UNI 9175 Class 1 I EMME\(option flame retardant\)](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass [AATCC 8 or 116 Dry/wet crocking](#) [ASTM D4157-07 Wyz abrasion \(heavy duty\) 100k](#) [ASTM D3511 Pilling](#) [AATCC 16 Light fastness](#) [CA TB 117-2013](#) [ASTM E 84 Class 1\(Adhered\)](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CARE & MAINTENANCE

Wash or dry cleaning P(W).

Cura is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)

40°C shrinkage max 1.0%



60°C shrinkage max 2.0%

	CARATTERISTICHE PRINCIPALI - PRINCIPAL CHARACTERISTICS CARACTERISTIQUES PRINCIPALES - HAUPT EIGENSCHAFTEN	Date 10/11/2020 Edition 01
---	--	-------------------------------

Caratteristica Characteristic Caractéristique Charakterdarsteller	Norma Norm Norme Norm	Tolleranza Tolerance Tolérance Toleranz	Dichiarato Declared Déclaré Deklariert	SEALIFE
Peso (g/ml) – Weight (g/lm) Poids (g/ml) - Gewicht (g/lm)	EN 12127	± 5 %	460	
Peso (g/m ²) - Weight (g/m ²) Poids (g/m ²) - Gewicht (g/m ²)	EN 12127	± 5 %	330	
Altezza (cm) - Width (cm) Largeur (cm) - Breite (cm)	-----	± 2 %	140	
Resistenza all'abrasione (cicli) Abrasion resistance (rubs) Résistance à l'abrasion (tours) Scheuerfestigkeit (Scheuertouren)	ISO 12947-2 (Martindale)	± 10 %	100.000	
Solidità del colore alla luce (scala dei blu) Light fastness (blue scale) Solidité à la lumière (échelle des bleu) Lichtechtheit (Blaumaßstabe)	ISO 105-B02 (Xenotest)	da 5 a 8	6	
Solidità del colore allo sfregamento (scala dei grigi) Fastness to rubbing (grey scale) Solidité au frottement (échelle des gris) Reibechtheit (Graumaßstabe)	ISO 105-X12 (Crockmeter)	da 4 a 5	4/5	
Pilling (2000 cicli) - Pilling (2000 rubs) Pilling (2000 tours) - Pilling (2000 scheuertouren)	ISO 12945-2	da 4 a 5	5	
Composizione Composition Composition Zusammensetzung	100% POLIESTERE RICICLATO - Certificato SEAQUAL 100% RECYCLED POLYESTER - SEAQUAL Certified 100% POLYESTER RECYCLÉ - Certifié SEAQUAL 100% RECYCELTES POLYESTER - SEAQUAL Zertifiziert			
Leggere differenze di colore tra un lotto e l'altro sono da considerarsi normali Slight colour differences between one lot and another have to be considered within commercial tolerance Légères différences de couleur entre un lot et l'autre doivent être considérés comme étant normales Leichte Farbunterschiede sind zwischen zwei Partien als normal zu betrachten				
Reazione al fuoco – Flammability - Classement au feu – Feuersicherung				
Can meet UNI 9175 Class 1 IM EN 1021-1 & 2 BS 7176 Class Low Hazard California TB 117-2013	Altri test fuoco possono essere superati, il superamento di alcuni test fuoco può dipendere dalla schiuma utilizzata Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used Autres tests feu peuvent être passés. La performance au feu dépend de la mousse utilisée Wird auch andere Brandschutzstandards erfüllen. Die flammhemmende Leistung ist anhängig von dem verwendeten Schaum			
Manutenzione e lavaggio – Cleaning and washing – Nettoyage et lavage – Reinigung und waschen				

	CARATTERISTICHE PRINCIPALI - PRINCIPAL CHARACTERISTICS CARACTERISTIQUES PRINCIPALES - HAUPT EIGENSCHAFTEN	Date 15/04/2019 Edition 00
---	--	-------------------------------

Caratteristica Characteristic Caractéristique Charakterdarsteller	Norma Norm Norme Norm	Tolleranza Tolerance Tolérance Toleranz	Dichiarato Declared Déclaré Deklariert
Peso (g/ml) – Weight (g/lm) Poids (g/ml) - Gewicht (g/lm)	EN 12127	± 5 %	520
Peso (g/m ²) - Weight (g/m ²) Poids (g/m ²) - Gewicht (g/m ²)	EN 12127	± 5 %	370
Altezza (cm) - Width (cm) Largeur (cm) - Breite (cm)	-----	± 2 %	140
Resistenza all'abrasione (cicli) Abrasion resistance (rubs) Résistance à l'abrasion (tours) Scheuerfestigkeit (Scheuertouren)	ISO 12947-2 (Martindale)	± 10 %	50.000
Solidità del colore alla luce (scala dei blu) Light fastness (blue scale) Solidité à la lumière (échelle des bleu) Lichtechtheit (Blaumaßstabe)	ISO 105-B02 (Xenotest)	da 5 a 8	6
Solidità del colore allo sfregamento (scala dei grigi) Fastness to rubbing (grey scale) Solidité au frottement (échelle des gris) Reibechtheit (Graumaßstabe)	ISO 105-X12 (Crockmeter wet-dry)	da 4 a 5	4/5
Pilling (2000 cicli) - Pilling (2000 rubs) Pilling (2000 tours) - Pilling (2000 scheuertouren)	ISO 12945-2	da 4 a 5	5
Composizione Composition Composition Zusammensetzung	100% POLIESTERE TREVIRA CS 100% POLYESTER TREVIRA CS 100% POLYESTER TREVIRA CS 100% POLYESTER TREVIRA CS		
Leggere differenze di colore tra un lotto e l'altro sono da considerarsi normali Slight colour differences between one lot and another have to be considered within commercial tolerance Légères différences de couleur entre un lot et l'autre doivent être considérés comme étant normales Leichte Farbunterschiede sind zwischen zwei Partien als normal zu betrachten			
Reazione al fuoco – Flammability - Classement au feu – Feuersicherung			
Can meet UNI 9174 - 8456 Class C1 UNI 9175 Class 1 IM DIN 4102 Class B1 NF 92501-7 Class M1 NF D 60013 Class AM18 EN 1021-1 & 2 BS Crib 5 BS 7176 Class Medium Hazard EN 13773 Class 1 OENORM 3800-1 Class B1, Q1, TR1 California TB117 USA NFPA 701 USA NFPA 260 IMO Part 8 Upholstery	Altri test fuoco possono essere superati, il superamento di alcuni test fuoco può dipendere dalla schiuma utilizzata Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used Autres tests feu peuvent être passés. La performance au feu dépend de la mousse utilisée Wird auch andere Brandschutzstandards erfüllen. Die flammhemmende Leistung ist anhängig von dem verwendeten Schaum		
Manutenzione e lavaggio – Cleaning and washing – Nettoyage et lavage – Reinigung und waschen			

CORTE

M0406 rev 02 del 07-01-2015

Technical data sheet

Composition:	Topcoat: Vinyl
Backing:	Backing 100% Polyester Hi-Loft 2™
Weight:	650 gr/m²
Width:	min. 137cm
Roll size:	+/- 30m*
Abrasion:	> 300.000 cycles (MARTINDALE)
Cold Crack:	-23°C
UV-Resistance:	ISO 105 B02: ≥ 7/8 (Blue Wool Scale)

* Typical roll length. Length may vary depending on the availability of standard roll size

Flame Retardancy**:	EU	EN 1021 Part 1 & 2	FR	NF P 92-503 / M2
	DE	DIN 4102 B2	EU	EN 71-2:2006+ A 1: 2007
	EU	ECE R 118.02 Anx. 6,7 & 8		Safety of Toys -part 2.
	EU	IMO 2010 FTP Part 8	US	FMVSS 302
	IT	UNI 9175 Classe 1.1 M		
	IT	UNE 23.727-90 IR/M.2		
Other characteristics	EU	(MED) Marine Equipment Directive		
	UK	UKCA		

** This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behaviour of this or any other material under actual conditions.

FINISHES AND TREATMENTS	PERMABLOK³ ADVANCED PROTECTION	Except VALENCIA™ Pure White 107-9607 that has	PERMABLOK³ ADVANCED PROTECTION PLUS+
-------------------------	---	--	--

Virucidal Activity:	ISO 18184:2019
	ISO 21702:2019
Bacteriostatic	ISO 22196:2011
Properties:	Value of antibacterial*** activity R>2.

*** Testing was conducted with material exposed to *Staphylococcus aureus*, *Staphylococcus aureus* (MRSA), *Escherichia coli* and *Klebsiella pneumoniae*.

WARRANTY	5 Years. Terms and Conditions apply.
----------	--------------------------------------

PERMABLOK³ and SPRADLING®, are registered trademarks of Spradling Holdings, Inc.®.



SUSTAINABLE PRODUCT PROFILE

Heavy Metals Free



*In accordance with REACH I, RoHS and ECI IA regulations

- AZO = Azo dyes
- CFC = Chlorofluorocarbons
- HCFC = Hydrochlorofluorocarbons
- BPA = Bisphenol A
- PBTs = Persistent Bio accumulative
and Toxic Chemicals
- PCP = Pentachlorophenol
- PCB = Pentachlorinated Biphenyl
- PCT = Polychlorinated Terphenyls

Certifications



Sustainable manufacturing certifications



Compliances



Valencia™ | SPRADLING®

Main Line Flax - Product information

MLF (TSR2) 0319 CD



Task seating



Soft seating



Curtains

Cigarette
& Match

Medium Hazard



Environmental



Year guarantee

Main Line Flax is the natural progression of our all-time favourite Main Line Plus fabric, building on our industry-leading bast fibre expertise to create a new inherently flame retardant fabric from sustainable sources. A symbol of purity, wild flax has been used in textiles for thousands of years thanks to its strong, long and smooth fibres found inside the stem of the plant. The fibre is spun into a 70-30 wool flax blend, then fibre-dyed to create beautiful mixture yarns which are woven into interesting solids and cross-colours inspired by the rich tones of rare jewels.



Technical information

UK

Industry Application
Workplace, Education, Hospitality & Leisure

Composition
70% Virgin Wool, 30% Flax

Environment
Certified to the EU Ecolabel
Rapidly renewable and compostable
Made from wool and bast fibre

Width
140 cm minimum

Weight
437 g/m² ±5% (612 g/lin.m ±5%)

Abrasion Resistance*
Heavy duty/10 year guarantee
Independently certified to ≥50,000
Martindale cycles

Flammability
EN 1021 - 1 (cigarette)
EN 1021 - 2 (match)
BS 7176 Low Hazard
BS 5852 Ignition Source 5
BS 7176 Medium Hazard
NF D 60-013
ONORM B 3825 & A 3800-1 (58kg/m³
CMHR Foam)
UNI 9175 Classe 1 IM
BS 5867-2: Type B Curtains & Drapes
Note: Flammability performance is dependent on components used. Our certificates show what substrates have been used in our tests. For composite tests customers must ensure their complete furniture meets the necessary standards.

Light Fastness
5 (ISO 105 - B02)

Fastness to Rubbing
Wet: 3, Dry: 4 (ISO 105 - X12)

Cleaning
Vacuum regularly. Professionally dry clean or wipe clean with a damp cloth.

*Abrasion testing produces a wide variability of results even from the same test sample. The independent certificate of ≥50,000 cycles is available on our website or from our customer service team. Internally we specify this product at >35,000 cycles which we believe is realistic for repeatability of testing. Please be aware that abrasion testing alone is not a reliable indicator of the actual wear performance of fabrics. We're so confident in the durability of our products that we provide a robust 10 year guarantee (full details available).

Please note that seam performance is dependent on seam construction and needle and thread type. We recommend that appropriate sewing advice be taken.

Batch to batch variations in shade may occur within commercial tolerances. We reserve the right to alter technical specifications without notice. The Unregistered Design Rights and the Copyright in all designs are the exclusive property of Camira Fabrics Limited.

D

Einsatzbereich
Büro, Bildung, Hotellerie & Gastronomie

Zusammensetzung
70% Schurwolle, 30% Flachs

Umweltfreundlich
Nach Zertifikat EU Ecolabel
Schnell erneuerbar und kompostierbar
Mit Wolle und Bastfasern gefertigt

Breite
140 cm nutzbare Breite

Gewicht
437 g/m² ±5% (612 g/lfd.m ±5%)

Scheuerfestigkeit*
Schwerer Objekteintritt/10 Jahre Garantie
Extern zertifiziert mit ≥50,000
Scheuertouren Martindale

Feuersicherung
EN 1021 - 1 (Zigarettentest)
EN 1021 - 2 (Streichholztest)
BS 7176 Low Hazard
BS 5852 Ignition Source 5
BS 7176 Medium Hazard
NF D 60-013
ONORM B 3825 & A 3800-1 (58kg/m³
CMHR Foam)
UNI 9175 Classe 1 IM
BS 5867-2: Type B Curtains & Drapes
Bemerkung: Die Schwerentflammbarkeit hängt von den verwendeten Komponenten ab. Unsere Zertifikate zeigen auf, welche Substrate bei den Tests verwendet wurden. Bei Verbundtests muss sichergestellt sein, daß das komplette Möbel den entsprechenden Standards entspricht.

Lichtechtheit
5 (ISO 105 - B02)

Reibechtheit
Nass: 3, Trocken: 4 (ISO 105 - X12)

Reinigung
Regelmässig absaugen. Professionelle Trockenreinigung. Alternativ dazu mit einem feuchten Tuch abwischen.

*Die Scheuerfestigkeitsprüfung ergibt selbst bei gleichen Testmustern stark abweichende Ergebnisse. Das Zertifikat eines unabhängigen Prüfinstitutes über ≥50,000 Scheuertouren erhalten Sie von unserem Vertriebsinnendienst oder auf unserer Webseite. Intern spezifizieren wir dieses Produkt mit >35,000 Scheuertouren, die in der Serienfertigung als realistisch angenommen werden. Bitte nehmen Sie zur Kenntnis, dass die Scheuerfestigkeitsprüfung allein keine Aussagekraft über die Langlebigkeit eines Bezugstoffes hat. Wir sind von der Langlebigkeit unserer Produkte überzeugt und bieten daher 10 Jahre Garantie (Details auf Anfrage).

Eine optimale Nahtausreissfestigkeit hängt von der Nahtfahne, der verwendeten Nadel und dem Näh-Garn ab. Wir empfehlen daher Nähversuche durchzuführen.

Handelsübliche Farbabweichungen können auftreten und berechtigen nicht zur Reklamation. Wir behalten uns die Änderung technischer Spezifikationen vor. Die registrierten und nicht registrierten Urheberrechte der Dessinierungen sind ausschliessliches Eigentum der Camira Fabrics Limited.

F

Application industrielle
Lieu de travail, Education, Hôtellerie et loisirs

Composition
70% Laine Vierge, 30% Lin

Écologique
Avec le certificat EU Ecolabel
Rapidement renouvelable et compostable
Fabriqué avec de la Laine et des fibres originaire de Tiges

Largeur
140 cm minimum

Poids
437 g/m² ±5% (612 g/m.l ±5%)

Résistance à l'abrasion*
Usage intense/garantie 10 ans. Certificat indépendant ≥50,000 cycles Martindale

Flammabilité
EN 1021 - 1 (cigarette)
EN 1021 - 2 (allumette)
BS 7176 Low Hazard
BS 5852 Ignition Source 5
BS 7176 Medium Hazard
NF D 60-013
ONORM B 3825 & A 3800-1 (58kg/m³
CMHR Foam)
UNI 9175 Classe 1 IM
BS 5867-2: Type B Curtains & Drapes
Note: La performance de flammabilité dépend des composantes utilisées. Nos certificats indiquent les substrats utilisés dans nos tests. Pour les tests composites, les clients doivent s'assurer que leurs meubles complets satisfont aux normes nécessaires.

Solidité à la lumière
5 (ISO 105 - B02)

Solidité au Frottement
Mouillé: 3, Sec: 4 (ISO 105 - X12)

Nettoyage
Aspirer régulièrement. Nettoyage à sec professionnel. Autrement, essuyer avec un tissu humide.

*Les tests de résistance à l'abrasion proposent une large variété de résultat final, parfois sur le même échantillon de tissu. Le certificat indépendant de ≥50,000 cycles est disponible sur notre site internet; vous pouvez également contacter notre Service Clients. Nous validons ce produit – en interne – à >35,000 cycles; ce qui est, d'après nous, plus réaliste dans le but d'obtenir une continuité égale des résultats de tests. Merci de noter que l'abrasion seule ne constitue pas un indicateur de confiance dans la performance du tissu à long terme. Nous avons une confiance absolue en nos produits et leur durabilité; c'est pour cela que nous vous offrons une garantie robuste de 10 ans.

Veuillez noter que la performance du joint dépend de sa construction ainsi que de l'aiguille et du type de fil utilisés.

Une variation de couleurs peut provenir (commerciallement tolérable). Nous réservons le droit de changer les spécifications techniques sans préavis. Les Droits de Conception non-enregistrés et les droits d'auteur de tous les motifs sont la propriété exclusive de Camira Fabrics Limited.

ES

Aplicación Industrial
Puesto de Trabajo, Educación, Sector Hotelero & Placer

Composición
70% Lana Virgen, 30% Lino

Ambiental
Certificado con EU Ecolabel
Rapidamente renovable y compostable
Producido con lana y fibras naturales

Ancho
140 cm mínimo

Peso
437 g/m² ±5% (612 g/lin.m ±5%)

Resistencia a la abrasión*
Garantía de 10 años con uso intenso independientemente del certificado de ≥50,000 Ciclos Martindale

Inflamabilidad
EN 1021 - 1 (cigarillo)
EN 1021 - 2 (cerilla)
BS 7176 Low Hazard
BS 5852 Ignition Source 5
BS 7176 Medium Hazard
NF D 60-013
ONORM B 3825 & A 3800-1 (58kg/m³
CMHR Foam)
UNI 9175 Classe 1 IM
BS 5867-2: Type B Curtains & Drapes
Nota: El rendimiento de la inflamabilidad depende de los componentes usados. Nuestros certificados muestran qué substratos se han usado en nuestros tests. Para tests compuestos nuestros clientes deben asegurar si sus muebles cumplen la normativa al uso.

Solidez a la luz
5 (ISO 105 - B02)

Solidez al rozamiento
Húmedo: 3, Seco: 4 (ISO 105 - X12)

Limpieza
Limpiar con aspirador con regularidad. Limpiar en seco, o bien lavar con un paño húmedo.

*Los Test de Abrasión producen unos resultados muy variables incluso con la misma muestra. El certificado de ≥50,000 ciclos Martindale está disponible en nuestra web o se puede pedir al Departamento Comercial. Internamente certificamos este producto >35,000 ciclos, que pensamos que es lo más realista posible en este caso, con una repetición de resultados tan dispares. Tengan en cuenta que el Test de Abrasión solo no es un indicador fiable sobre el desgaste de un tejido. De hecho, estamos tan convencidos en la durabilidad de nuestros tejidos, que ofrecemos una garantía de 10 años (detalles completos disponibles).

Tenga en cuenta que el rendimiento de la costura depende de la construcción de la costura, además de la aguja y del tipo de rosca. Le recomendamos que se aconsejen para coser la costura.

Las variaciones de lote a lote en la sombra se puede producir dentro de tolerancias comerciales. Nos reservamos el derecho a efectuar modificaciones técnicas sin previo aviso. Los derechos sobre los diseños no registrados y los derechos de autor en todos los diseños son propiedad exclusiva de Camira Fabrics Limited.



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2579 — Contour
2578 — Contour Melange

Application

Upholstery
Panel

Composition

100% Post-consumer recycled polyester

Weight

500 g/lm — 16.13 oz/lin.yd

Width

140 cm — 55 inches

ENVIRONMENT

Environment, health, and safety

Meets Möbelfakta requirements

VOC emission

[Ansi/Bifma VOC test M71](#)

Life Cycle Assessment (LCA)

[LCA Summary Report](#)

PERFORMANCE

Abrasion

100,000 — rubs martindale (EN ISO 12947-2)
100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-8 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

[BS EN 1021 1&2 Cigarette and Match](#)

[BS EN 1021-1 Cigarette](#)

[CA TB 117-2013](#)

[ASTM E 84 Class 1\(Unadhered\)](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

[ASTM D4157-07 Wyz abrasion \(heavy duty\) 100k](#)

[ASTM D3511 Pilling](#)

[AATCC 16 Light fastness](#)

[AATCC 8 or 116 Dry/wet crocking](#)

[CA TB 117-2013](#)

[ASTM E 84 Class 1\(Unadhered\)](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CARE & MAINTENANCE

Wash or dry cleaning P(W).

Contour is made of polyester which is a material suited for environments with special requirements for cleaning.

Contour Melange is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



60°C shrinkage max 1.0%



74°C shrinkage max 2.0%

PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2440 — Step

Application

Upholstery

Composition

100% Trevira CS

Weight

470 g/lm — 15.16 oz/lin.yd

Width
 150 cm — 55 inches

ENVIRONMENT

Environment, health, and safety[OEKO-TEX® STANDARD 100](#)[EU Ecolabel](#)

Meets Möbelfakta requirements

VOC emission[Ansi/Bifma VOC test MZ1](#)**Life Cycle Assessment (LCA)**[LCA Summary Report](#)**US ACT pass** [ASTM D4157-07 Wyz abrasion \(heavy duty\) 100k](#) [ASTM D3511 Pilling](#) [AATCC 16 Light fastness](#) [AATCC 8 or 116 Dry/wet crocking](#) [CA TB 117-2013](#) [NFPA 701](#)

Abrasion test results exceeding ACT Performance

Guidelines are not an indicator of product lifespan.

Multiple factors affect fabric durability and appearance retention.

CARE & MAINTENANCE

Wash or dry cleaning P(W).

Step is made of Trevira CS which is a polyester material suited for environments with special requirements for cleaning.

Can be wiped with Virkon S, Actichlor Plus, Prime Source ren-93 or Ethanol (70-85%).

Always follow the manufacturer's instructions and finish by wiping with a damp cloth.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)

60°C shrinkage max 3.0%



74°C shrinkage max 5.0%

PERFORMANCE

Abrasion

100,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability[BS EN 1021 1&2 Cigarette and Match](#)[BS EN 1021-1 Cigarette](#)[BS 5852 Crib 5](#)[BS 7176 Medium hazard](#)[DIN 4102 - B1](#)[NF P 92-503/504/505 M1](#)[AM 18 - NF D 60-013-\(only for fabric\)](#)[ÖNORM A3800-B1-B3825-Q1 UK](#)[FAR/JAR 25.853 \(a\)\(i\)\(ii\)](#)[DIN EN 13501-1 B-s1,d0](#)[Class Uno UNI 9175 Class 1 I EMME](#)[CA TB 117-2013](#)[IMO MSC 307\(88\) Annex 1 part 8](#)[IMO MSC 307\(88\) Annex 1 part 8 UK](#)[MED Certificate IMO](#)[MED Certificate IMO UK](#)[CAN/ ULC-S102.2](#)[CAN/ULC-S109](#)[NFPA 701](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.

PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2441 / 2442 / 2543 — Step Melange

Application

Upholstery

Composition

100% Trevira CS

Weight

470 g/lm — 15.16 oz/lin.yd

Width
 140 cm — 55 inches

ENVIRONMENT

Environment, health, and safety[OEKO-TEX® STANDARD 100](#)[EU Ecolabel](#)

Meets Möbelfakta requirements

VOC emission[Ansi/Bifma VOC test M71](#)**Life Cycle Assessment (LCA)**[LCA Summary Report](#)**US ACT pass** [ASTM D4157-07 Wyz abrasion \(heavy duty\) 100k](#) [ASTM D3511 Pilling](#) [CA TB 117-2013](#) [NFPA 701](#) [AATCC 16 Light fastness](#) [AATCC 8 or 116 Dry/wet crocking](#)

Abrasion test results exceeding ACT Performance

Guidelines are not an indicator of product lifespan.

Multiple factors affect fabric durability and appearance retention.

CARE & MAINTENANCE

Wash or dry cleaning P(W).

Step Melange is made of Trevira CS which is a polyester material suited for environments with special requirements for cleaning.

Can be wiped with Virkon S, Actichlor Plus, Prime Source ren-93 or Ethanol (70-85%).

Always follow the manufacturer's instructions and finish by wiping with a damp cloth.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)

60°C shrinkage max 3.0%



74°C shrinkage max 5.0%

PERFORMANCE

Abrasion

100,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability[DIN 4102 - B1](#)[NF P 92-503/504/505 M1](#)[BS EN 1021 1&2 Cigarette and Match](#)[BS EN 1021-1 Cigarette](#)[BS 5852 Crib 5](#)[ÖNORM A3800-B1-B3825-Q1 UK](#)[FAR/JAR 25.853 \(a\) \(i\) \(ii\)](#)[AM 18 - NF D 60-013-\(only for fabric\)](#)[CA TB 117-2013](#)[Class Uno UNI 9175 Class 1 I EMME](#)[DIN EN 13501-1 B-s1,d0](#)[DIN EN 13501-1 B-s1,d0](#)[IMO MSC 307\(88\) Annex 1 part 8](#)[IMO MSC 307\(88\) Annex 1 part 8 UK](#)[MED Certificate IMO](#)[MED Certificate IMO UK](#)[CAN/ULC-S102.2](#)[CAN/ULC-S109](#)[NFPA 701](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.

**Field 2**

Design: Alfredo Häberli

Type: Upholstery, panel fabric

In accordance with California Bill AB 2998 and similar legislation within the United States, this product may not be used as upholstery. It can be used for vertical applications.

Composition: 100% Trevira CS

Yarn type: Filament

Binding: Panama

Width: Approx. 140 cm, 55 inches

Weight: Approx. 450 g/lin.m, 14.5 oz/ly

Repeat: None

Colour difference may occur

Cleaning: Vacuum clean frequently, ideally every week if fixed covers. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.

Also washable at 60-80°C, half wash load. Drip drying.

Mount in moist condition. Shrinkage app. 2% at 60°C.

Be aware of increased shrinking and creasing the higher the temperature.

Disinfection, see kvadrat.dk

More info: Care and maintenance kvadrat.dk



10 year warranty

**Field 2****Abrasion**

Approx. 80.000 Martindale rubs, EN ISO 12947

Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention

Pilling

Note 4-5, EN ISO 12945

Seam slippage

Seam parallel to warp: 4.0 mm parallel to weft: 3.5 m
EN ISO 13 936-2 180 Newton

Lightfastness

Note 6-7 ISO 105-B02

Fastness to rubbing

Dry note 4-5 ISO 105-X12

Wet note 4-5 ISO 105-X12

Absorption

0.55/Class D (flat), 0.85/Class B (waved) EN ISO 354

Airflow

431 Pa s/m EN 29053

Flame resistance

AS/NZS 3837 class 1

ASTM E84 Class A Unadhered

BS 5852 Crib 5

BS 5867 Part 2 type B

CAN ULC S102

CAN ULC S109

DIN 4102 B1

EN 1021-1/2

EN 13501-1 B-s1, d0

FAR 25.853

GB 8624 B1

IMO FTP Code 2010 Part 5

IMO FTP Code 2010 Part 8

NF D 60 013

NF P 92 507 M1

NFPA 701

ÖNORM B1/Q1

SN 198 898 5.2

UNI 9175 1IM

UNI 9177 Classe 1

US Cal. Bull. 117-2013

**ACT Guidelines Woven fabrics****Flammability**

US Cal. Bull. 117-2013

Dry & Wet Crocking

Dry Crocking: Grade 5.0

Wet Crocking: Grade 5.0

Colour Fastness to Light

Grade 4.5 minimum 40 hours

Physical properties

Pilling Class 4-5

Breaking Strength warp 274 / weft 282 lbs.

Seam Slippage warp 98.5 / weft 93.5 lbs.

Abrasion

80.000 cycles Martindale – High Traffic / Public Spaces

Quality benefits

Complies with Möbelfakta

Very good abrasion

Very good lightfastness

Permanent flame retardant

Washable

Environmental benefits

EU Ecolabel compliant

Free of intentionally added PFAS

No use of halogen-based flame retardants (incl. brominated and chlorinated)

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

Mono material designed for circularity

Green building certificates

Greenguard Gold: Low chemical emission

Environmental Product Declaration (EPD): 3rd Party Verified.

ISO 14025 & EN 15804. Developed in accordance with the

European standard EN 15804+A2.

Health Product Declaration (HPD): Declaring textile content and substance

Country of origin

Holland

Launch

2008

Warranty

10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard material is FSC certified and / or contains recycled content.

For further information

kvadrat.dk


FOCUS SPECIFICATIONS

Design no.	2536	
Application	contract soft seating	
Composition	100% New Zealand wool	
Weight	g/lm	660
	oz/lin.yd	21.29
Width	cm	140
	inches	55
Abrasion	rubs martindale (EN ISO 12947-2)	100,000
	rubs martindale (ASTM D4966-02) (heavy duty upholstery)	60,000
Pilling	scale 1-5, max. 5 - EN ISO 12945-2	4
Light fastness	scale 1-8, max. 8 - EN ISO 105-B02	5-7
Rubbing fastness	scale 1-5, max. 5 - EN ISO 105x12 (wet/dry)	4-5/4-5
Maintenance	dry cleaning P(S) 	
US ACT	 <u>ASTM D4966 Martindale (heavy duty)</u> pass  <u>ASTM D3511 Pilling</u> pass  <u>AATCC 16 Light fastness</u> pass  <u>AATCC 8 or 116 Wet/dry crocking</u> pass  <u>CA TB 117-2013</u> pass Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan	
Acoustic test air flow resistance	<u>EN 29053 & ISO 9053-1 (airflow resistance)</u>	
Flammability	<u>BS EN 1021 1&2 Cigarette and Match</u> <u>BS 5852 Part 1 0,1 Cigarette & Match,</u> <u>The Furniture and Furnishing</u> <u>Regulations 1988</u> <u>CA TB 117-2013</u> <u>Class Uno UNI 9175 Class 1 I EMME</u> <u>AM 18 - NF D 60-013-(only for fabric)</u> <u>ÖNORM A3800-B1-B3825-Q1 UK</u> Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.	
Certificates	Complete list	
Environment	OEKO-TEX® STANDARD 100 EU Ecolabel	
Design	Inger Mosholt Nielsen	
Colours	Cenk Kivrikoglu	

FOCUS MELANGE SPECIFICATIONS

Design no.		2530/2531/2532/2533/2534/2535
Application		contract soft seating
Composition		100% New Zealand wool
Weight	g/lm oz/lin.yd	660 21.29
Width	cm inches	140 55
Abrasion	rubs martindale (EN ISO 12947-2)	100,000
	rubs martindale (ASTM D4966-02) (heavy duty upholstery)	60,000
Pilling	scale 1-5, max. 5 - EN ISO 12945-2	4
Light fastness	scale 1-8, max. 8 - EN ISO 105-B02	5-7
Rubbing fastness	scale 1-5, max. 5 - EN ISO 105x12 (wet/dry)	4-5/4-5
Maintenance	dry cleaning P(S) 	
US ACT	<u>ASTM D4966 Martindale (heavy duty)</u>	pass
	<u>ASTM D3511 Pilling</u>	pass
	<u>AATCC 16 Light fastness</u>	pass
	<u>AATCC 8 or 116 Wet/dry crocking</u>	pass
	<u>CA TB 117-2013</u>	pass
	Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan	
Acoustic test air flow resistance	<u>EN 29053 & ISO 9053-1 (airflow resistance)</u>	
Flammability	<u>BS EN 1021 1&2 Cigarette and Match</u> <u>BS 5852 Part 1 0,1 Cigarette & match</u> <u>CA TB 117-2013</u> <u>Class Uno UNI 9175 Class 1 I EMME</u> <u>AM 18 - NF D 60-013-(only for fabric)</u> <u>ÖNORM A3800-B1-B3825-Q1 UK</u> Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.	
Certificates		Complete list
Environment	STANDARD 100 by OEKO-TEX® EU Ecolabel	
Design	Inger Mosholt Nielsen	

GRAIN SPECIFICATIONS

Design no.	2287/2288	
Application	contract soft seating	
Composition	2287: 92% post-consumer recycled polyester / 8% polyester 2288: 80% post-consumer recycled polyester / 20% polyester	
Weight	g/lm oz/lin.yd	615 19.84
Width	cm inches	140 55
Abrasion	rubs martindale (EN ISO 12947-2) double rubs wyzenbeek (ASTM D4157-07) (heavy duty upholstery)	100,000 100,000
Pilling	scale 1-5, max. 5 - EN ISO 12945-2	5
Light fastness	scale 1-8, max. 8 - EN ISO 105-B02	5-7
Rubbing fastness	scale 1-5, max. 5 - EN ISO 105x12 (wet/dry)	4-5/4-5
Maintenance	wash or dry cleaning P(W) Grain is made of polyester which is a material suited for environments with special requirements for cleaning.  60°C shrinkage max. 1,5%.	
US ACT	 <u>CA TB 117-2013</u> pass  <u>ASTM D4157-07 Wyz abrasion (heavy duty) 100k</u> pass  <u>ASTM D3511 Pilling</u> pass  <u>AATCC 16 Light fastness</u> pass  <u>AATCC 8 or 116 Wet/dry crocking</u> pass Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan	
Flammability	<u>BS EN 1021 1&2 Cigarette and Match</u> <u>BS EN 1021-1 Cigarette</u> <u>CA TB 117-2013</u> Contains no flame retardant chemicals. Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.	

PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2409 — Fame

Application

Upholstery

Composition

95% New Zealand wool, 5% Polyamide

Weight

630 g/lm — 20.32 oz/lin.yd

Width
 140 cm — 55 inches

ENVIRONMENT

Environment, health, and safety[OEKO-TEX® STANDARD 100](#)[EU Ecolabel](#)

Meets Möbelfakta requirements

VOC emission[Ansi/Bifma VOC test M7.1](#)

PERFORMANCE

Abrasion

200,000 — rubs martindale (EN ISO 12947-2)

140,000 — rubs martindale (ASTM D4966) (heavy duty upholstery)

Pilling

4 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability[BS EN 1021-1 Cigarette](#)[BS EN 1021-2 Match](#)[BS 5852 Crib 5](#)[CA TB 117-2013](#)[Class Uno UNI 9175 Class 1 I EMME](#)[AM 18 - NF D 60-013-\(only for fabric\)](#)[BS 5852 Part 1 0,1 Cigarette & Match, The Furniture and Furnishing Regulations 1988](#)[ÖNORM A3800-B1-B3825-Q1 UK](#)[IMO MSC 307\(88\) Annex 1 part 8](#)[MED Certificate IMO](#)[IMO MSC 307\(88\) Annex 1 part 8 UK](#)[MED Certificate IMO UK](#)[BS 476 Part 7 class 1](#)[DIN 4102 - B1 \(option flame retardant\)](#)[BS 5852 Crib 5 \(option flame retardant\)](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass [AATCC 8 or 116 Dry/wet crocking](#) [ASTM D4966 Martindale \(heavy duty\)](#) [ASTM D4970 Pilling](#) [AATCC 16 Light fastness](#) [CA TB 117-2013](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CARE & MAINTENANCE

Dry cleaning P(S)



NOTE

ECHOING THE ELEGANT SIMPLICITY OF SPIRALING BOAT ROPES, COIL TRANSFORMS THE CONCEPT OF ENDLESSNESS INTO A TANGIBLE DESIGN. EACH LINE IS METICULOUSLY STRUCTURED, YET RETAINS A LOOSE, FLOWING QUALITY THAT INVITES DETAILED EXPLORATION. CRAFTED FROM SOFT, LIGHT MATERIALS, COIL OFFERS A STIMULATING TOUCH AND BRINGS A SENSE OF ORGANIC BEAUTY TO ANY SPACE, EFFORTLESSLY ENHANCING YOUR ENVIRONMENT WITH ITS REFINED ELEGANCE.

[DOWNLOAD CERTIFICATIONS](#)

[DOWNLOAD COLORS](#)

[DOWNLOAD DIGITAL CARD](#)

COMPOSITION

50% Cotton
19% Acrylic
17% Polyester
7% Viscose
7% Wool

WIDTH

App. 140 cm

WEIGHT

640 g/m² (+/- 5%)

FLAMMABILITY

[California TB 117:2013](#)
[EN 1021.1&2 \(C&M\)](#)
[BS 5852 Part 0-1 \(C&M\)](#)
[BS 5852-Crib5 \(with coating\)](#)

ABRASION RESISTANCE

[100000 Martindale cycles \(EN ISO 12947-2\)](#)

PILLING

[3/4 \(EN ISO 12945-2\)](#)

LIGHT FASTNESS

4/5 (EN ISO 105-B02)

FASTNESS TO RUBBING

Wet 4; Dry 5 (EN ISO 105- X12)

CLEANING

Do not wash
Do not bleach
Iron at low temperature
Gentle cleaning with PCE
Do not tumble dry





Synergy - Product information

LDS (TSR12) 1122



Task seating



Soft seating



Cigarette & Match



IMO FTP Code (Part 8)



Acoustic



Year guarantee



With Treatment



Curtains



Medium Hazard

Epitomising natural simplicity, Synergy is a wool rich fabric which is at once both irresistibly soft and ultra-high performing. Delicately felted, with a beautifully relaxed drape, the understated aesthetics showcase the intriguing colouration of this considered textile. Featuring exquisite fibre dyed shades and sumptuous piece dyed solids within its palette of 75 colourways, there truly is a tone for every scheme.



Technical information

UK	D	F	ES
Composition 95% Virgin Wool, 5% Polyamide	Zusammensetzung 95% Schurwolle, 5% Polyamid	Composition 95% Laine Vierge, 5% Polyamid	Composición 95% Lana Virgen, 5% Polyamid
Environment Certified to the EU Ecolabel Certified to Indoor Advantage™ Gold	Umweltfreundlich Nach Zertifikat EU Ecolabel Nach Zertifikat Indoor Advantage™ Gold	Écologique Avec le certificat EU Ecolabel Certifié à Indoor Advantage™ Gold	Ambiental Certificado con EU Ecolabel Certificado de Indoor Advantage™ Gold
Width 140 cm minimum	Breite 140 cm nutzbare Breite	Largeur 140 cm minimum	Ancho 140 cm mínimo
Weight 400 g/m² ±5% (560 g/lin.m ±5%)	Gewicht 400 g/m² ±5% (560 g/lfd.m ±5%)	Poids 400 g/m² ±5% (560 g/m.l ±5%)	Peso 400 g/m² ±5% (560 g/lin.m ±5%)
Abrasion Resistance* Heavy duty/10 year guarantee Independently certified to ≥100,000 Martindale cycles	Scheuerfestigkeit* Schwerer Objekteinsetz/10 Jahre Garantie. Extern zertifiziert mit ≥100,000 Scheuertouren Martindale	Résistance à l'abrasion* Usage intense/Garantie 10 ans Certificat indépendant ≥100,000 cycles Martindale	Resistencia a la abrasión* Garantía de 10 años con uso intenso Independientemente del certificado de ≥100,000 Ciclos Martindale
Flammability EN 1021 - 1 (cigarette) EN 1021 - 2 (match) BS 7176 Low Hazard NF D 60-013 ONORM B 3825 & A 3800-1 (over CMHR 58kg/m³ Foam) UNI 9175 Classe 1 IM EN 13501-1 Adhered Class D, s1, d0 IMO FTP Code (Part 8) The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK domestic cigarette and match) Optional: Please specify when ordering: BS 5852 Ignition Source 5 when FR treated BS 7176 Medium Hazard when FR treated EN 13501-1 Adhered Class B, s1, d0 when FR treated EN 13501-1 Un-adhered Class D, s2, d0 when FR treated BS 5867-2: Type B Curtains & Drapes when FR treated <i>Note: Flammability performance is dependent on components used. Our certificates show what substrates have been used in our tests. For composite tests customers must ensure their complete furniture meets the necessary standards.</i>	Feuersicherheit EN 1021 - 1 (Zigarettentest) EN 1021 - 2 (Streichholztest) BS 7176 Low Hazard NF D 60-013 ONORM B 3825 & A 3800-1 (mit CMHR 58kg/m³ Schaum) UNI 9175 Classe 1 IM EN 13501-1 Adhered Class D, s1, d0 IMO FTP Code (Part 8) The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK Wohnmöbel Zigarettentest und Streichholztest) Bitte bei Auftragserteilung angeben: BS 5852 Ignition Source 5 wenn mit FR ausgerüstet BS 7176 Medium Hazard wenn mit FR ausgerüstet EN 13501-1 Adhered Class B, s1, d0 wenn mit FR ausgerüstet EN 13501-1 Un-adhered Class D, s2, d0 wenn mit FR ausgerüstet BS 5867-2: Type B Curtains & Drapes wenn mit FR ausgerüstet <i>Bemerkung: Die Schwerentflammbarkeit hängt von den verwendeten Komponenten ab. Unsere Zertifikate zeigen auf, welche Substrate bei den Tests verwendet wurden. Bei Verbundtests muss sichergestellt sein, daß das komplette Möbel den entsprechenden Standards entspricht.</i>	Flammabilité EN 1021 - 1 (cigarette) EN 1021 - 2 (allumette) BS 7176 Low Hazard NF D 60-013 ONORM B 3825 & A 3800-1 (avec CMHR 58kg/m³ Mousse) UNI 9175 Classe 1 IM EN 13501-1 Adhered Class D, s1, d0 IMO FTP Code (Part 8) The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK domicile cigarette et allumette) Prière de le mentionner lors de la commande: BS 5852 Ignition Source 5 si traitement FR BS 7176 Medium Hazard si traitement FR EN 13501-1 Adhered Class B, s1, d0 si traitement FR EN 13501-1 Un-adhered Class D, s2, d0 si traitement FR BS 5867-2: Type B Curtains & Drapes si traitement FR <i>Notez: La performance de flammabilité dépend des composantes utilisées. Nos certificats indiquent les substrats utilisés dans nos tests. Pour les tests composites, les clients doivent s'assurer que leurs meubles complets satisfont aux normes nécessaires.</i>	Inflamabilidad EN 1021 - 1 (cigarillo) EN 1021 - 2 (cerilla) BS 7176 Low Hazard NF D 60-013 ONORM B 3825 & A 3800-1 (sobre 58kg/m³ Foam CMHR) UNI 9175 Classe 1 IM EN 13501-1 Adhered Class D, s1, d0 IMO FTP Code (Part 8) The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK doméstico cigarillo y cerilla) Por favor especificar cuando se requiere en el pedido: BS 5852 Ignition Source 5 estando con tratamiento FR BS 7176 Medium Hazard estando con tratamiento FR EN 13501-1 Adhered Class B, s1, d0 estando con tratamiento FR EN 13501-1 Un-adhered Class D, s2, d0 estando con tratamiento FR BS 5867-2: Type B Curtains & Drapes estando con tratamiento FR <i>Nota: El rendimiento de la inflamabilidad depende de los componentes usados. Nuestros certificados muestran qué substratos se han usado en nuestros tests. Para tests compuestos nuestros clientes deben asegurar si sus muebles cumplen la normativa al uso.</i>
Light Fastness 5 (ISO 105 - B02)	Lichtechtheit 5 (ISO 105 - B02)	Solidité à la lumière 5 (ISO 105 - B02)	Solidez a la luz 5 (ISO 105 - B02)
Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)	Reibechtheit Nass: 4, Trocken: 4 (ISO 105 - X12)	Solidité au Frottement Mouillé: 4, Sec: 4 (ISO 105 - X12)	Solidez al rozamiento Húmedo: 4, Seco: 4 (ISO 105 - X12)
Acoustic Properties Acoustically transparent. Acoustic graphs available upon request.	Akustische Eigenschaften Akustisch durchlässig. Akustische Messwerte auf Anfrage.	Propriétés Acoustiques Acoustiquement transparent. Graphiques acoustiques disponibles sur demande.	Acústico Propiedades Acústicamente transparente. Gráficos acústicos disponibles bajo petición.
Cleaning Vacuum regularly. Wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning use steam or professionally dry clean. Full details can be found in our cleaning and disinfection guide.	Reinigung Regelmässig absaugen. Mit einem feuchten Tuch abwischen oder mit einem geeigneten Polstershampoo behandeln. Für eine Grundreinigung bitte Dampf oder professionelle Trockenreinigung verwenden. Weitere Informationen finden Sie in unserem Leitfaden zur Reinigung und Pflege.	Nettoyage Passez l'aspirateur régulièrement. Essayez avec un chiffon humide en utilisant un shampoing/savon pour tissus d'ameublement exclusif. Pour un nettoyage en profondeur, utilisez la vapeur ou un nettoyage à sec professionnel. Vous trouverez tous les détails dans notre guide de nettoyage et de désinfection.	Limpieza Uso aspirador regularmente. Limpiar con un trapo usando jabón y agua o producto limpieza para tapicerías. Para una limpieza más profunda usen vapor o limpieza en seco profesional. Los detalles completos se encuentran en nuestra guía de limpieza y desinfección.
*Abrasion testing produces a wide variability of results even from the same test sample. The independent certificate of ≥100,000 cycles is available on our website or from our customer service team. Internally we also specify this product at > 100,000 cycles which we believe is realistic for repeatability of testing. Please be aware that abrasion testing alone is not a reliable indicator of the actual wear performance of fabrics. We're so confident in the durability of our products that we provide a robust 10 year guarantee (full details available). Please note that seam performance is dependent on seam construction and needle and thread type. We recommend that appropriate sewing advice be taken. Batch to batch variations in shade may occur within commercial tolerances. We reserve the right to alter technical specifications without notice. The Unregistered Design Rights and the Copyright in all designs are the exclusive property of Camira Fabrics Limited.	*Die Scheuerfestigkeitsprüfung ergibt selbst bei gleichen Testmustern stark abweichende Ergebnisse. Das Zertifikat eines unabhängigen Prüfinstitutes über ≥100.000 Scheuertouren erhalten Sie von unserem Vertriebsinnendienst oder auf unserer Webseite. Intern spezifizieren wir auch dieses Produkt mit >100.000 Scheuertouren, die in der Serienfertigung als realistisch angenommen werden. Bitte nehmen Sie zur Kenntnis, dass die Scheuerfestigkeitsprüfung allein keine Aussagekraft über die Langlebigkeit eines Bezugsstoffes hat. Wir sind von der Langlebigkeit unserer Produkte überzeugt und bieten daher 10 Jahre Garantie (Details auf Anfrage). Eine optimale Nahtausreißfestigkeit hängt von der Nahtfahne, der verwendeten Nadel und dem Näh-Garn ab. Wir empfehlen daher Nähversuche durchzuführen. Handelsübliche Farbabweichungen können auftreten und berechtigen nicht zur Reklamation. Wir behalten uns die Änderung technischer Spezifikationen vor. Die registrierten und nicht registrierten Urheberrechte der Dessinierungen sind ausschliessliches Eigentum der Camira Fabrics Limited.	*Les tests de résistance à l'abrasion proposent une large variété de résultat final, parfois sur le même échantillon de tissu. Le certificat indépendant de ≥100,000 cycles est disponible sur notre site internet, vous pouvez également contacter notre Service Clients. Nous validons également – en interne – à > 100,000 cycles; ce qui est, d'après nous, plus réaliste dans le but d'obtenir une continuité égale des résultats de tests. Merci de noter que l'abrasion seule ne constitue pas un indicateur de confiance dans la performance du tissu à long terme. Nous avons une confiance absolue en nos produits et leur durabilité, c'est pour cela que nous vous offrons une garantie robuste de 10 ans. Veuillez noter que la performance du joint dépend de sa construction ainsi que de l'aiguille et du type de fil utilisés. Une variation de couleurs peut provenir (commerciallement tolérable). Nous réservons le droit de changer les spécifications techniques sans préavis. Les Droits de Conception non-enregistrés et les droits d'auteur de tous les motifs sont la propriétés exclusives de Camira Fabrics Limited.	*Los Test de Abrasión producen unos resultados muy variables incluso con la misma muestra. El certificado de ≥100,000 ciclos Martindale está disponible en nuestra web o se puede pedir al Departamento Comercial. Internamente también certificamos este producto >100,000 ciclos, que pensamos que es lo más realista posible en este caso, con una repetición de resultados tan dispares. Tengan en cuenta que el Test de Abrasión solo no es un indicador fiable sobre el desgaste de un tejido. De hecho, estamos tan convencidos en la durabilidad de nuestros tejidos, que ofrecemos una garantía de 10 años (detalles completos disponibles). Tenga en cuenta que el rendimiento de la costura depende de la construcción de la costura, además de la aguja y del tipo de rosca. Le recomendamos que se aconsejen para coser la costura. Las variaciones de lote a lote en la sombra se puede producir dentro de tolerancias comerciales. Nos reservamos el derecho a efectuar modificaciones técnicas sin previo aviso. Los derechos sobre los diseños no registrados y los derechos de autor en todos los diseños son propiedad exclusiva de Camira Fabrics Limited.



**Remix 3**

Design: Giulio Ridolfo

Type: Upholstery
 Composition: 90% new wool, 10% nylon
 Yarn type: Worsted
 Binding: Plain
 Width: Approx. 140 cm, 55 inches
 Weight: Approx. 420 g/lin.m, 13.6 oz/ly

Colour difference may occur

Cleaning: Vacuum clean frequently, ideally every week.
 Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.

Disinfection, see kvadrat.dk

More info: Care and maintenance kvadrat.dk



10 year warranty

**Remix 3****Abrasion**

Approx. 100.000 Martindale rubs, EN ISO 12947

Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention

Pilling

Note 4, EN ISO 12945

Seam slippage

Seam parallel to warp: 5.0 mm parallel to weft: 3.0 mm
 EN ISO 13 936-2 180 Newton

Lightfastness

Note 5-7 ISO 105-B02

Fastness to rubbing

Dry note 4-5 ISO 105-X12
 Wet note 3-5 ISO 105-X12

Absorption

0.55/Class D (flat), 0.80/Class B (waved) EN ISO 354

Airflow

465 Pa s/m EN 29053

Flame resistance

AS/NZS 1530.3
 AS/NZS 3837 class 2
 ASTM E84 Class A Unadhered
 ASTM E84 Class A Adhered
 BS 5852 crib 5 with treatment *
 BS 5852 part 1
 EN 1021-1/2
 EN 13501 B-s2, d0 wrapped, with treatment *
 GB 50222 B1 with treatment (Chinese) *
 IMO FTP Code 2010 Part 7 with treatment *
 IMO FTP Code 2010 Part 8
 NF D 60 013
 NFPA 260
 ÖNORM B1/Q1
 SN 198 898 5.3 with treatment *
 UNI 9175 1IM
 US Cal. Bull. 117-2013

Free from added flame retardant chemicals as standard

** To pass this test flame retardant treatment is necessary.
 We are looking into more environmentally friendly alternatives but for now, the external finisher may use a treatment containing halogen-based flame retardants*

**ACT Guidelines Woven fabrics****Flammability**

US Cal. Bull. 117-2013

Dry & Wet Crocking

Dry Crocking: Grade 4.5

Wet Crocking: Grade 4.5

Colour Fastness to Light

Grade 4.0 minimum 40 hours

Physical properties

Pilling Class 4

Breaking Strength warp 132 / weft 138 lbs.

Seam Slippage warp 126.5 / weft 130 lbs.

Abrasion

100.000 cycles Martindale – High Traffic / Public Spaces

Benefits of wool

Wool is a renewable resource

Wool is very comfortable because of its ability to absorb/
give off humidity

Wool is flame retardant

Wool is biodegradable

Wool is naturally soil resistant

Wool ages with grace

Quality benefits

Complies with Möbelfakta

Very good abrasion

Good lightfastness

Flame retardant

Environmental benefits

EU Ecolabel compliant

No content of PFCs or 'PFAS'

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

Healthier Hospitals compliant

Green building certificates

Greenguard Gold: Low chemical emission

Environmental Product Declaration (EPD): Based on a LCA
following EN 15804 and follow the standard of ISO 14040

Health Product Declaration (HPD): Declaring textile content
and substance

Country of origin

United Kingdom

Launch

2007

Warranty

10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard
material is FSC certified and / or contains recycled content.

For further information

kvadrat.dk



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2537 / 2538 / 2539 — UMBER

Application

Upholstery

Composition

85% New Zealand wool, 15% Polyamide

Weight

535 g/lm — 17.26 oz/lin.yd

Width

140 cm — 55 inches

ENVIRONMENT



Environment, health, and safety

[OEKO-TEX® STANDARD 100](#)

[EU Ecolabel](#)

Meets Möbelfakta requirements

VOC emission

[Ansi/Bifma VOC test M7.1](#)

PERFORMANCE

Abrasion

200,000 — rubs martindale (EN ISO 12947-2)

200,000 — rubs martindale (ASTM D4966) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-6 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

[BS EN 1021 1&2 Cigarette and Match](#)

[BS EN 1021-1 Cigarette](#)

[BS EN 1021-2 Match](#)

[BS 5852 Part 1 0,1 Cigarette & Match, The Furniture and Furnishing Regulations 1988](#)

[BS 5852 Crib 5](#)

[Class Uno UNI 9175 Class 1 I EMME](#)

[CA TB 117-2013](#)

[ASTM E 84 Class 1\(Unadhered\)](#)

[IMO MSC 307\(88\) Annex 1 part 8](#)

[IMO MSC 307\(88\) Annex 1 part 8 UK](#)

[MED Certificate IMO](#)

[MED Certificate IMO UK](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 [CA TB 117-2013](#)

 [ASTM E 84 Class 1\(Unadhered\)](#)

 [ASTM D4966 Martindale \(heavy duty\)](#)

 [ASTM D4970 Pilling](#)

 [AATCC 16 Light fastness](#)

 [AATCC 8 or 116 Dry/wet crocking](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CARE & MAINTENANCE

Dry cleaning P(S)





NOTE

INSPIRED BY THE SERENE BEAUTY OF THE DANISH SHORES, LOOP SHOWCASES A DELICATE QUALITY, WITH A SIMILAR APPEARANCE ON BOTH SIDES. ITS SURFACE REVEALS A FASCINATING INTERPLAY OF VARYING SIZES, COLORS, AND THICKNESSES, EACH STRAND METICULOUSLY CRAFTED TO HIGHLIGHT ITS UNIQUE CHARACTER. CAPTURING THE ESSENCE OF DANISH COASTAL LANDSCAPES, WITH ITS GENTLE TEXTURE AND SUBTLE ELEGANCE, IT IS A REFINED CHOICE FOR ANY SPACE.

[DOWNLOAD CERTIFICATIONS](#)

[DOWNLOAD COLORS](#)

[DOWNLOAD DIGITAL CARD](#)

COMPOSITION

39% Acrylic
38% Cotton
8% Linen
7% Polyamide
5% Polyester
3% Wool

WIDTH

App. 140 cm

WEIGHT

600 g/m² (+/- 5%)

FLAMMABILITY

[California TB 117:2013](#)
[EN 1021.1&2 \(C&M\)](#)
[BS 5852 Part 0-1 \(C&M\)](#)
[BS 5852-Crib5 \(with coating\)](#)

ABRASION RESISTANCE

[>100000 Martindale cycles \(EN ISO 12947-2\)](#)

PILLING

[3/4 \(EN ISO 12945-2\)](#)

LIGHT FASTNESS

4 (EN ISO 105-B02)

FASTNESS TO RUBBING

Wet 3/4; Dry 5 (EN ISO 105X12)

CLEANING

Do not wash
Do not bleach
Iron at low temperature
Gentle cleaning with PCE
Do not tumble dry





NOTE

CHANNELING THE RUGGED CHARM OF DENMARK'S COASTAL LANDSCAPES, TWIST FEATURES NATURAL, WOOLLY FIBERS THAT PROVIDE A TACTILE AND LUXURIOUS DESIGN. THE INNOVATIVE WEAVING TECHNIQUE, INSPIRED BY TRADITIONAL MARINE ROPES, CREATES A COMPLEX, CAPTIVATING APPEARANCE. WHETHER IN A DOMESTIC SETTING OR A BUSTLING PUBLIC SPACE, TWIST'S VOLUMINOUS AND NATURAL ALLURE INTRODUCES AN INVITING, REFINED ATMOSPHERE, BRIDGING THE GAP BETWEEN THE OUTDOORS AND INDOOR COMFORT.

[DOWNLOAD CERTIFICATIONS](#)

[DOWNLOAD COLORS](#)

[DOWNLOAD DIGITAL CARD](#)

COMPOSITION

42% Acrylic
19% Viscose
19% Recycled Cotton
13% Polyester
6% Cotton
1% Recycled Other Fibers

WIDTH

App. 140 cm

WEIGHT

700 g/m² (+/- 5%)

FLAMMABILITY

[California TB 117:2013](#)

[EN 1021.1&2 \(C&M\)](#)

[BS 5852 Part 0-1 \(C&M\)](#)

[BS 5852-Crib5 \(with coating\)](#)

ABRASION RESISTANCE

[70000 Martindale cycles \(EN ISO 12947-2\)](#)

PILLING

[4 \(EN ISO 12945-2\)](#)

LIGHT FASTNESS

4/5 (EN ISO 105-B02)

FASTNESS TO RUBBING

Wet 4/5; Dry 5 (EN ISO 105X12)

CLEANING

Do not wash
Do not bleach
Iron at low temperature
Gentle cleaning with PCE
Do not tumble dry





NOTE

KNOT REIMAGINES THE HUMBLE BOAT ROPE, TRANSFORMING IT INTO A STRIKING DESIGN ELEMENT. THROUGH A SIMPLE YET EFFECTIVE KNOTTING TECHNIQUE, DIMENSIONS EXPAND AND SHAPES REDEFINE, YIELDING A PIECE THAT IS BOTH FUNCTIONAL AND DECORATIVELY RICH. EACH KNOT HIGHLIGHTS THE ARTISTRY OF ITS CREATION, FORMING INTRICATE PATTERNS THAT CAPTIVATE THE EYE AND ENHANCE ANY ROOM WITH ITS UNIQUE CHARM.

[DOWNLOAD CERTIFICATIONS](#)

[DOWNLOAD COLORS](#)

[DOWNLOAD DIGITAL CARD](#)

COMPOSITION

70% Wool
24% Cotton
6% Polyester

WIDTH

App. 140 cm

WEIGHT

680 g/m² (+/- 5%)

FLAMMABILITY

[California TB 117:2013](#)
[EN 1021.1&2 \(C&M\)](#)
[BS 5852 Part 0-1 \(C&M\)](#)
[UNI 9175 Classe 1.IM](#)
[BS 5852-Crib5 \(with coating\)](#)

ABRASION RESISTANCE

[>100000 Martindale cycles \(EN ISO 12947-2\)](#)

PILLING

[4/5 \(EN ISO 12945-2\)](#)

LIGHT FASTNESS

5 (EN ISO 105-B02)

FASTNESS TO RUBBING

Wet 3/4; Dry 4/5 (EN ISO 105X12)

CLEANING

Do not wash
Do not bleach
Iron at low temperature
Gentle cleaning with PCE
Do not tumble dry





PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2591 / 2592 / 2593 / 2594 / 2595 / 2596 / 2597 — Nobel

Application

Upholstery

Composition

100% New Zealand wool

Weight

800 g/lm — 25.8 oz/lin.yd

Width

140 cm — 55 inches

ENVIRONMENT

Environment, health, and safety

[OEKO-TEX® STANDARD 100](#)

[EU Ecolabel](#)

Meets Möbelfakta requirements

VOC emission

[Ansi/Bifma VOC test M7.1](#)

PERFORMANCE

Abrasion

75,000 — rubs martindale (EN ISO 12947-2)

50,000 — rubs martindale (ASTM D4966) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

[BS EN 1021 1&2 Cigarette and Match](#)

[BS 5852 Part 1 0,1 Cigarette & Match, The Furniture and Furnishing Regulations 1988](#)

[BS 5852 Crib 5](#)

[Class Uno UNI 9175 Class 1 | EMME](#)

[IMO MSC 307\(88\) Annex 1 part 8](#)

[IMO MSC 307\(88\) Annex 1 part 8 UK](#)

[MED Certificate IMO](#)

[MED Certificate IMO UK](#)

[CA TB 117-2013](#)

[ASTM E 84 Class 2\(Unadhered\)](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 [AATCC 8 or 116 Dry/wet crocking](#)

 [CA TB 117-2013](#)

 [ASTM E 84 Class 2\(Unadhered\)](#)

 [ASTM D4966 Martindale \(heavy duty\)](#)

 [ASTM D4970 Pilling](#)

 [AATCC 16 Light fastness](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CARE & MAINTENANCE

Dry cleaning P(S)





Panama



* PER LE CARATTERISTICHE NELLA VERSIONE FIRE CONSULTARE I TEST ONLINE INQUADRANDO CON LA FOTOCAMERA IL QR CODE. FOR THE TECHNICAL FEATURES IN FIRE VERSION, PLEASE CHECK THE ONLINE TESTS BY FRAMING THIS QR CODE WITH THE CAMERA.

TEST SOLIDITÀ DEL COLORE COLOR FASTNESS

PROPRIETÀ PROPERTY	RIF. NORMATIVO TEST METHOD	PRESTAZIONI PERFORMANCE
Solidità del colore allo strofinio a secco, 500 cicli <i>Dry rub fastness, 500 cycles</i>	EN ISO 11640	≥ 4 Scala dei Grigi <i>Grey Scale</i>
Solidità del colore allo strofinio a umido, 250 cicli <i>Wet rub fastness, 250 cycles</i>	EN ISO 11640	≥ 3/4 Scala dei Grigi <i>Grey Scale</i>
Solidità del colore allo strofinio con sudore artificiale, 80 cicli <i>Artificial solution rub fastness, 80 cycles</i>	EN ISO 11640 / EN ISO 11641	≥ 3/4 Scala dei Grigi <i>Grey Scale</i>
Solidità del colore alla luce artificiale*	EN ISO 105-B02 (Met. 3)	≥ 5 Scala dei Blu <i>Blue Scale</i>

TEST FISICI PHYSICAL CHARACTERISTICS

PROPRIETÀ PROPERTY	RIF. NORMATIVO TEST METHOD	PRESTAZIONI PERFORMANCE
Adesione della rifinitura a secco <i>Adhesion of finish dry</i>	EN ISO 11644	≥ 2 N/10mm
Carico di strappo <i>Tear strength</i>	EN ISO 3377-1	≥ 20 N
Resistenza alla flessione, 50.000 cicli <i>Flex resistance, 50.000 cycles</i>	EN ISO 5402-1	Nessuna rottura <i>No cracks</i>

CONSIGLI PER LA PULIZIA E MANUTENZIONE ADVICES FOR CLEANING AND MAINTENANCE

Eventuali macchie si possono eliminare usando un panno inumidito con acqua e sapone neutro
Spots can be cleaned with a lightly damp cloth and mild soap

Asciugare immediatamente dopo il trattamento
Dry immediately after the treatment

Non strofinare, ma tamponare delicatamente dai bordi al centro della macchia
Do not rub. Use a circular motion working toward the centre of the stain

Evitare la luce diretta al sole
Avoid any direct exposure to the sun

Evitare l'esposizione a fonti di calore
Keep the leather away from direct heat

Spolverare regolarmente la pelle con un panno morbido ed asciutto
Dust regularly with a soft and dry cloth

* Conforme alla Direttiva sull'equipaggiamento marino (MED)
Modulo B / Compliance to Marine Equipment Directive (MED) Module B

* Test di infiammabilità / Flammability test: EN 1021-1, EN 1021-2, B55852:Source 0, B55852:Source 1, Cal TB117, NFPA 260/UFAC

* Test eseguiti periodicamente sui campioni di pellame secondo il piano di audit annuale. Il processo di produzione standard garantisce la conformità al requisito
The tests are performed periodically on the leather samples in accordance to the annual audit plan. The standardized production process ensures the conformance to the requirement

L'ARTICOLO È REALIZZATO NEL RISPETTO DELLA DIRETTIVA REACH ED È CONFORME ALL'ULTIMA VERSIONE AGGIORNATA DELLA RSL_DANI
THE ARTICLE IS MANUFACTURED IN COMPLIANCE WITH THE REACH DIRECTIVE AND COMPLIES WITH THE LATEST VERSION OF THE RSL_DANI

CERTIFICAZIONI DI SISTEMA SYSTEM CERTIFICATIONS

COMPANY WITH ENVIRONMENTAL SYSTEM CERTIFIED BY DNV
ISO 14001

COMPANY WITH SAFETY SYSTEM CERTIFIED BY DNV
ISO 45001

COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV
ISO 9001

COMPANY WITH INFORMATION SECURITY MANAGEMENT SYSTEM CERTIFIED BY DNV
ISO/IEC 27001

COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV
IATF 16949

COMPANY WITH ENERGY MANAGEMENT SYSTEM CERTIFIED BY DNV
ISO 50001

VALID FOR IT DEPARTMENT



RICONOSCIMENTI AWARDS



ADERENTE A JOIN IN



CERTIFICAZIONI DI PRODOTTO PRODUCT CERTIFICATIONS

S-P-00344 EPD*
environdec.com



EPD & PROCESS EPD
ISO 14025

LEATHER FROM ITALY
FULL CYCLE
UNI EN 16484:2015

TRACEABILITY
TRC SC 410



*SU RICHIESTA ON REQUEST

DANI S.p.A.
Z.I. Via della Concia, 186
36071 Arzignano (VI) Italy
Tel. +39 0444 454111
www.gruppodani.com



I COLORI DEL PRODOTTO SONO SOGGETTI A VARIAZIONE, LA LORO DISPONIBILITÀ SARÀ CONFERMATO IN SEDE DI ORDINE.
PRODUCT COLORS ARE SUBJECT TO CHANGE, THEIR AVAILABILITY WILL BE CONFIRMED AT THE MOMENT OF THE ORDER.



I TEST SONO ESEGUITI NEL RISPETTO DELLE PIÙ RECENTI DISPOSIZIONI. PER VISIONARE L'ULTIMA VERSIONE INQUADRA QUI. TESTS ARE PERFORMED PERIODICALLY IN ACCORDANCE WITH THE MOST RECENT PROVISIONS. TO VIEW THE LATEST VERSION: CLICK HERE.

PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

40408890 — Cubic

Application

Upholstery

Composition

Fabric: Atlantic 100% polyester

Foam: 5mm 50 kg non fr pu foam

Backing: circular knit polyester


Weight

1060 g/lm — 34.19 oz/lin.yd

Width

140 cm — 55 inches

ENVIRONMENT



Meets Möbelfakta requirements

PERFORMANCE

Abrasion

110,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

[BS EN 1021 1&2 Cigarette and Match](#)

[BS EN 1021-1 Cigarette](#)

[CA TB 117-2013](#)

[ASTM E 84 Class 1\(Adhered\)](#)

[ASTM E 84 Class 1\(Unadhered\)](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 [AATCC 8 or 116 Dry/wet crocking](#)

 [ASTM D4157-07 Wyz abrasion \(heavy duty\) 100k](#)

 [ASTM D3511 Pilling](#)

 [AATCC 16 Light fastness](#)

 [CA TB 117-2013](#)

 [ASTM E 84 Class 1\(Adhered\)](#)

 [ASTM E 84 Class 1\(Unadhered\)](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CARE & MAINTENANCE

Wipe with a damp cloth.

Regular gentle vacuum cleaning helps to preserve the fabric's attractive colour and appearance.



PRODUCT SPECIFICATION
ELMOBALTIQUE

ELMOBALTIQUE is a sturdy aniline leather with a slight batique-effect. It possesses the characteristic features of the natural hide such as visible insect-bites and scars from healed wounds. The grain of the leather varies in structure and it offers extraordinary comfort.

Raw material:	Scandinavian cattle
Hide size:	Approx 5,0 m ²
Type of Tanning:	Chrome tanning
Type of Dyeing:	Dyed through
Type of Finish:	Soil and water resistant treatment

A hide is selected at random from every batch of finished leather and tested at Elmo's laboratory in accordance with the following:

Property	Target value	Method	Evaluation
Thickness	1,3 – 1,5 mm		
Lightfastness	3	ISO 105-B02	
Dry-rubbing	50 cycles/4	ISO 11640	ISO 105 – A03
Wet-rubbing	20 cycles/4	ISO 11640	ISO 105 – A03
Sweat-rubbing	20 cycles/4	ISO 11640	ISO 105 – A03
Tear strength	20 N	SS-EN ISO 3377-1	

Flame approved, Furniture	According to certificate	EN 1021 – 1&2
Flame approved, Furniture	According to certificate	ISO 8191 – 1&2
Flame approved, Furniture	According to certificate	CA TB 117-2013
Flame approved, Ship/Off-shore	According to certificate	IMO 2010 FTP Code part 8
Flame approved, Aircraft	Individual batch certificate upon customers request	FAR 25,853 (a)

Colour assessment: Daylight source D 65, closely corresponding to CIE, Standard light D 65

Date: January 2018

Replaces: April 2017

**OUTDOOR
TECHNICAL FEATURES**

true



28/5/2021

MAGLIA™ | Spradling

SPECIFICHE TECNICHE

SETTORE

AUTOMOTIVE

- ✓ Caravan & Camper
- ✓ Automotive in generale
- ✓ Trasporti Pubblici
- ✓ Moto

CONTRACT

- ✓ Healthcare
- ✓ Hospitality
- ✓ Ufficio
- ✓ Outdoor
- ✓ Spazi Pubblici
- ✓ Residenziale

NAUTICA

- ✓ Nautica (Esterni)
- ✓ Nautica (Interni)

DESIGN:

Tessuti

COMPOSIZIONE:

Vinilo / Uretano

BACKING

Hi-Loft²™

PROTECTIVE FINISHES

PERMABLOK³®
ADVANCED VINYL PROTECTION

LARGHEZZA:

137.00 cm

LUNGHEZZA DEL RULLO:

30.00 m

PESO:

680.00 gr/m2

CERTIFICAZIONE ANTIFIAMMA₁

- US: CAL TB 117-2013, Section E
- Unione Europea: EN 1021 Part 1 & 2
- ECE Regulation No.118:03 (R118.02 Annexes 6, 7 & 8)
- Spagna: UNE 23.727-90 1R/M.2
- Francia: NF P 92-503/M2
- Germania: DIN 4102 B2
- Italia: UNI 9175 (1987) / UNI 9175/FA1 (1994) Classe 1JM (UNO I EMME)
- Austria: ÖNORM B 3825, Gruppe 1 - Schwerbrennbares Verhalten



28/5/2021

MAGLIA™ | Spradling

- Austria: ÖNORM B 3800 Teil 1, Qualmbildungsklasse Q1 – schwachqualmend
- IMO Res. MSC.307 (88) (FTP 2010 Code) Annex 1 Part 8
- Stati Uniti: FMVSS 302
- Stati Uniti: FAR 25/853
- (MED) Direttiva sull'equipaggiamento marittimo (nella versione di volta in volta valida)
- EN 71-2:2006+A1:2007 - Sicurezza dei giocattoli - Parte 2: Infiammabilità

FINITURE E TRATTAMENTI

- Cold Crack -29°C
- Antibacterial Protection
- PERMABLOK3®
- Finitura antimacchia
- >100.000 cicli Martindale (EN ISO 12947:1999 Part 2)
- Supporto e rivestimento resistenti alla muffa
- Resistenza UV XENOTEST DIN 54004/ NTC 1479 - SCALA BLUE WOOL
- EN 71-3 Sicurezza dei giocattoli (Migrazione di determinati elementi)
- 2005/84/CE (italati nei giocattoli e negli articoli per la puericultura)
- Resistente alle macchie di solfuro
- Finitura antistatica

GARANZIA

- 5 Anni

1 Questo termine e i dati corrispondenti si riferiscono alle prestazioni tipiche nei test specifici indicati e non devono essere intesi per determinare un comportamento di questo o altri materiali in condizioni reali di incendio.



Product scan (≈20x20 cm) or picture

FIFTYSHADES - BIANCO

A30320-1

The essential texture: a yarn-dyed weave perfect for upholstery and any decoration. Very resistant, it is fit for residential or hospitality, indoor or outdoor.

Apparentemente un unito monocolore, è in realtà il risultato dell'intreccio di due colori, più o meno contrastanti. Tinto in filo, è estremamente resistente ed è ideale per imbottiti e drappeggi.

Un tissage exceptionnel. Un jacquard teint en fil, ignifuge, idéal pour sièges ou rideaux avec un tombé parfait. Il est applicable à l'hôtellerie et également conçu pour un usage outdoor.

COMPOSITION:	100%PL FLAME RETARDANT
--------------	---------------------------

WIDTH:	145 cm
--------	--------

WEIGHT:	600 gr/m
---------	----------





Product scan (≈20x20 cm) or picture

DIECIELODE - AVORIO

A30316-1

A high-performance macro texture becomes a decoration element with an ethnic taste. The clear ground in all colour versions enhances the pattern.

Una macro texture che diventa decorazione. Uno jacquard materico dal sapore etnico e dalle alte prestazioni. In tutte le dieci varianti il fondo chiaro evidenzia il disegno.

Une macro-texture qui devient une décoration de goût ethnique. Dans tous les coloris le fond clair met en évidence le dessin.

COMPOSITION: 100%PL FLAME
RETARDANT

WIDTH: 135 cm

WEIGHT: 740 gr/m





Product scan (≈20x20 cm) or picture

FABTHIRTY - BIANCO

A30319-1

A contemporary tweed with a natural appearance. Unexpected colour combinations and 5 different technical yarns for a flame-retardant, outdoor jacquard. Resistant and sustainable, it is ideal for upholstery and is guaranteed for 4 years.

Un tweed contemporaneo dall'aspetto naturale e morbido. Una semplicità sofisticata per uno jacquard flame-retardant e outdoor dalla complessa composizione materica e cromatica. Ideale per imbottiti e garantito 4 anni.

Cinq fils techniques sont entrelacés pour créer une surface raffinée et unique avec des associations de couleur inattendues. Une simplicité sophistiquée pour un jacquard ignifuge et outdoor qui, vu de près, révèle une composition complexe des couleurs et des matières. Un tweed contemporain et souple, à l'aspect naturel. Résistant et éco-durable, il est idéal pour les capitonnés et est garanti quatre ans.

COMPOSITION: 100%PL FLAME
RETARDANT

WIDTH: 140 cm

WEIGHT: 670 gr/m



HOME - TINTA UNITA*

* available only for the support bands of "Farfalla"

* disponibile solo per le fasce di supporto di "Farfalla"

* disponible uniquement pour les bandes de soutien "Farfalla"

Tempotest Home®

DATI TECNICI - TECHNICAL FEATURES

TEMPOTEST HOME®	Composizione Composition	Altezza Width	Peso Weight	Solidità dei colori alle intemperie artificiali Color fastness to artificial weathering	Finissaggio Finishing
TINTA UNITA	100% fibra acrilica "outdoor" tinta in massa 100% solution dyed outdoor acrylic fibre	152 cm 60"	270 gr/m² (+/- 5%) 7.95 oz/yd² (+/- 5%)	(UNI EN ISO 105 B04) Grado ≥ 7/8 scala dei blu Grado ≥ 4/5 scala dei grigi dopo 1000 h di esposizione (UNI EN ISO 105 B04) Degree ≥ 7/8 on the blue scale Degree ≥ 4/5 on the grey scale after 1000 h of exposition	PFAS Free antimacchia idro repellente oleo removibile antimuffa PFAS Free soil resistant water-repellent oil cleanable mold resistant
		304 cm 120"			
STRIATO		145 cm 57"	280 gr/m² (+/- 5%) 8.25 oz/yd² (+/- 5%)		
SAND		152 cm 60"	270 gr/m² (+/- 5%) 7.95 oz/yd² (+/- 5%)		
RASO		140 cm 55"	350 gr/m² (+/- 5%) 12.35 oz/yd² (+/- 5%)		

CERTIFICAZIONE - CERTIFICATION



MANUTENZIONE E LAVAGGIO - MAINTENANCE AND CLEANING

Le macchie sui tessuti delle collezioni Tempotest Home® possono essere eliminate con una semplice soluzione di acqua (non più di 40°) e sapone, spazzolando e risciacquando accuratamente. È possibile lavare i tessuti a secco o in lavatrice a 30° con detersivo liquido e con centrifuga blanda. Lasciare asciugare il tessuto all'aria aperta. Non asciugare con apparecchi elettrici e non stirare con vapore. Il trattamento delle macchie a base acquosa così come l'igienizzazione dei tessuti Tempotest Home® possono essere effettuati anche con una soluzione di candeggina (ipoclorito di sodio) - non candeggina delicata - diluendo 1 parte di candeggina in 4 parti di acqua. Dopo questo trattamento è sempre necessario risciacquare accuratamente il tessuto e lasciarlo asciugare all'ombra per evitare ingiallimenti.



Stains on Tempotest Home® fabrics can be removed with a solution of water (not more than 40°C) and neutral soap, brushing and rinsing thoroughly. It is possible to dry wash the fabric or in washing machine at 30°C with liquid detergent. Use low speed spindryer. Let dry the fabric at the open air. Do not dry with electrical appliances and do not iron with steam. Water-based stains treatment and Tempotest Home® fabrics sanitizing, can also be done with a solution of bleach containing sodium hypochlorite - not gentle bleach - diluted 1 part bleach to 4 parts water. After this treatment, it is always necessary to rinse the fabric thoroughly and then let it dry in the shade to avoid any yellowing effect.

GARANZIA - WARRANTY

I tessuti delle collezioni Tempotest Home® sono coperti da una garanzia di 6 anni. Tale garanzia copre esclusivamente la perdita di colore dovuta alla normale esposizione all'azione del sole e degli agenti atmosferici in generale. Condizioni di garanzia disponibili su TEMPOTEST.IT.

Tempotest Home® fabrics have a warranty of 6 years. The warranty only covers loss of colour and tenacity, due to the normal exposure to the action of UV rays and weather conditions in general. Conditions of warranty available at TEMPOTEST.IT.

true



True Design s.r.l.
Via Leonardo Da Vinci 2
35040 Sant'Elena (PD) Italy
Tel. +39 0429 692483
info@truedesign.it
www.truedesign.it

Inspire. Create. Deliver.